
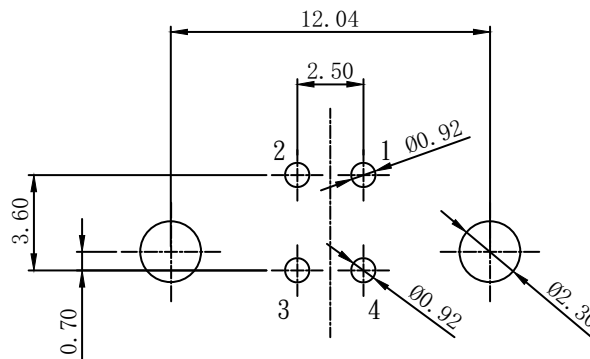
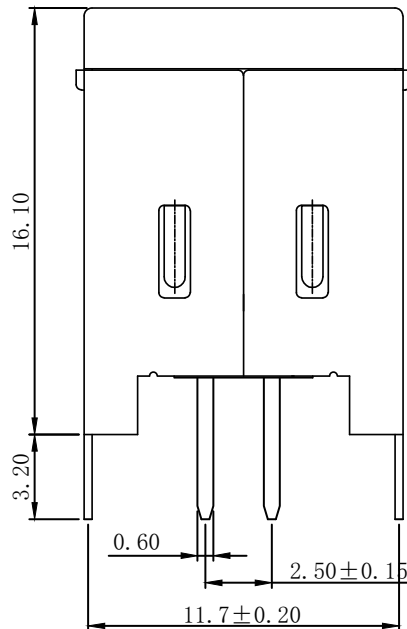


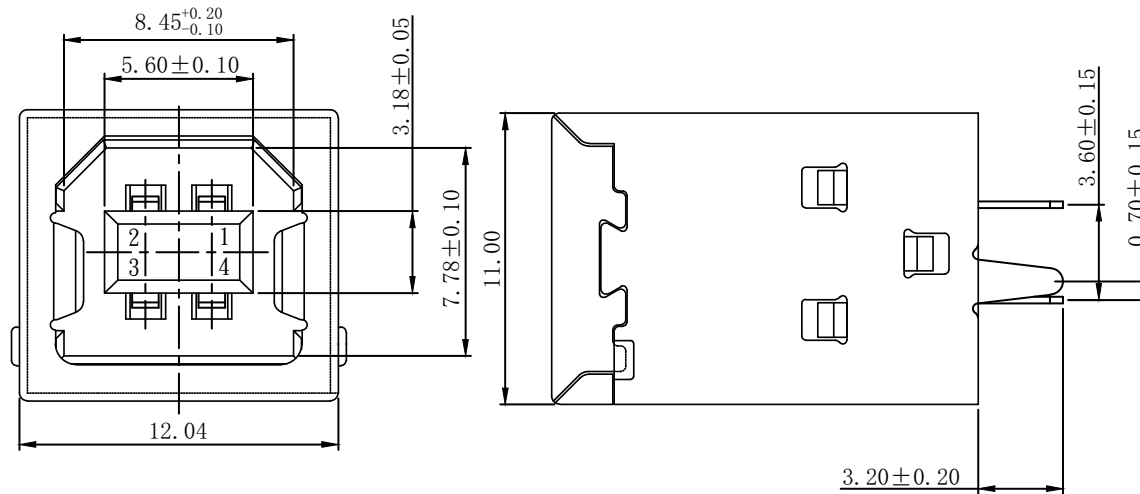

PCB LAYOUT

Specification

*Electrical Characteristics:

Contact Current Rating:1.5Amperes.

Dielectric Withstanding Voltage:AC500V r.m.s

Insulation Resistance:1000 MΩ Minimum.

Contact Resistance:30 mΩ Maximum.

*Environmental:

Operating Temperature:-30°~+85°

*Mechanical Characteristics

Contact Insertion Force:3.57kg.Maximum.

Contact Separation Force:1.02kg.Minimum.

*Material:

Housing: Thermoplastic UL 94V-0.

Contact:Copper Alloy(t=0.25mm).

Shell:SK5(t=0.30mm).

Can accord with management standards for "environment-related substances to be controlled"

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SDR36M2BKS30-4B-LF
SERIES
FEMALE
DIP 180°
ROW 3.6mm
LEADFREE
4 PIN B TYPE
SEMI GOLD 30u"
BLACK
METAL FOOT X 2

DESCRIPTION: USB BF 180度 排距3.6