


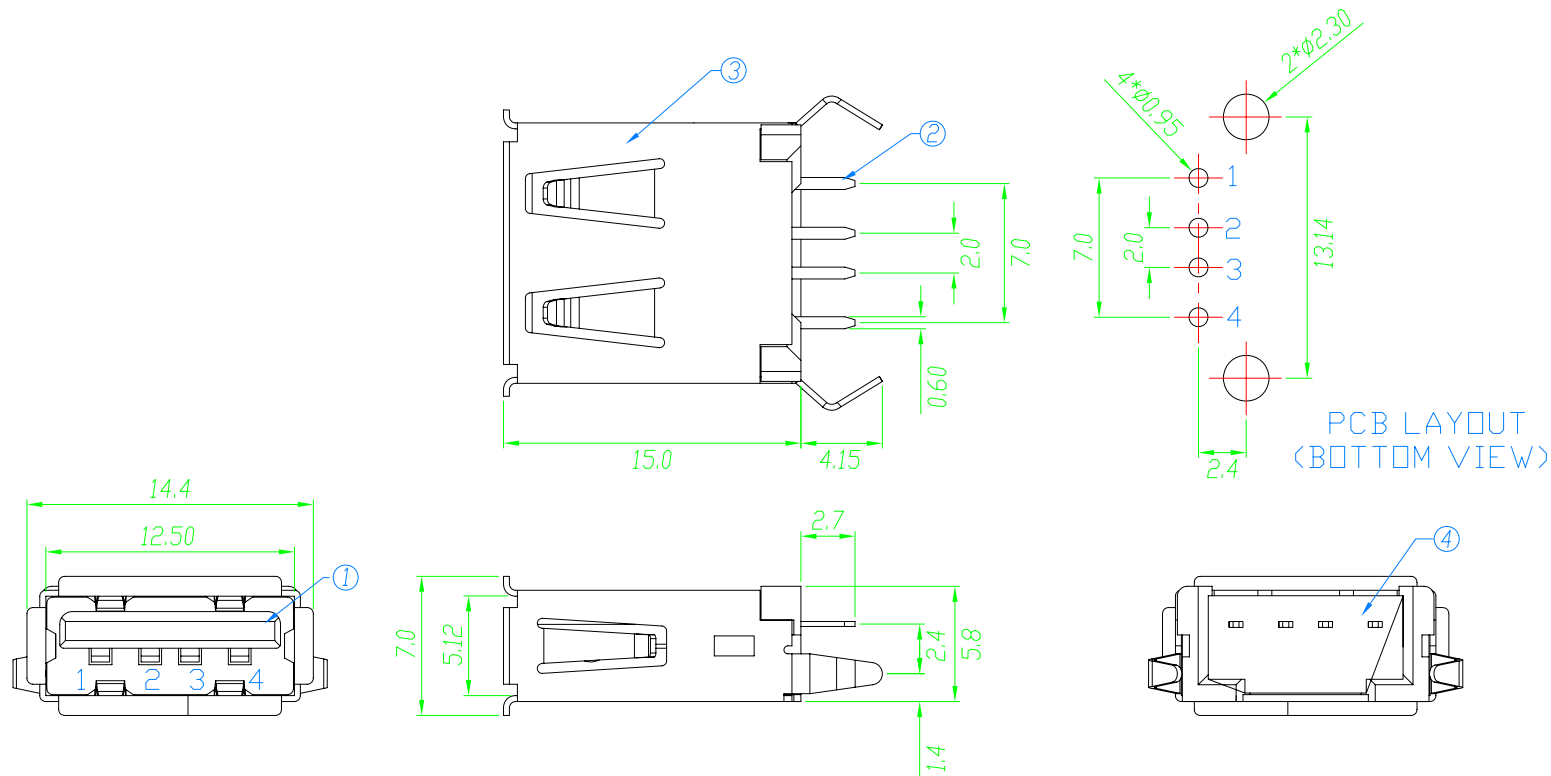

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage: 500V AC (rms) for 1 Minute (Rev. 2.0)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	WHITE	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:30u"; Ni:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	Ni: 80~120U"
4	BOTTOM COVER	PBT G.F.	WHITE	1	

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.38

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.13

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

USB-SDWHS30-4A-LF

SERIES
LEADFREE
4 PIN A TYPE
SEMI GOLD 30u"
WHITE
DIP 180°
FEMALE

DESCRIPTION: USB A TYPE VERTICAL 4 PIN DIP

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com