


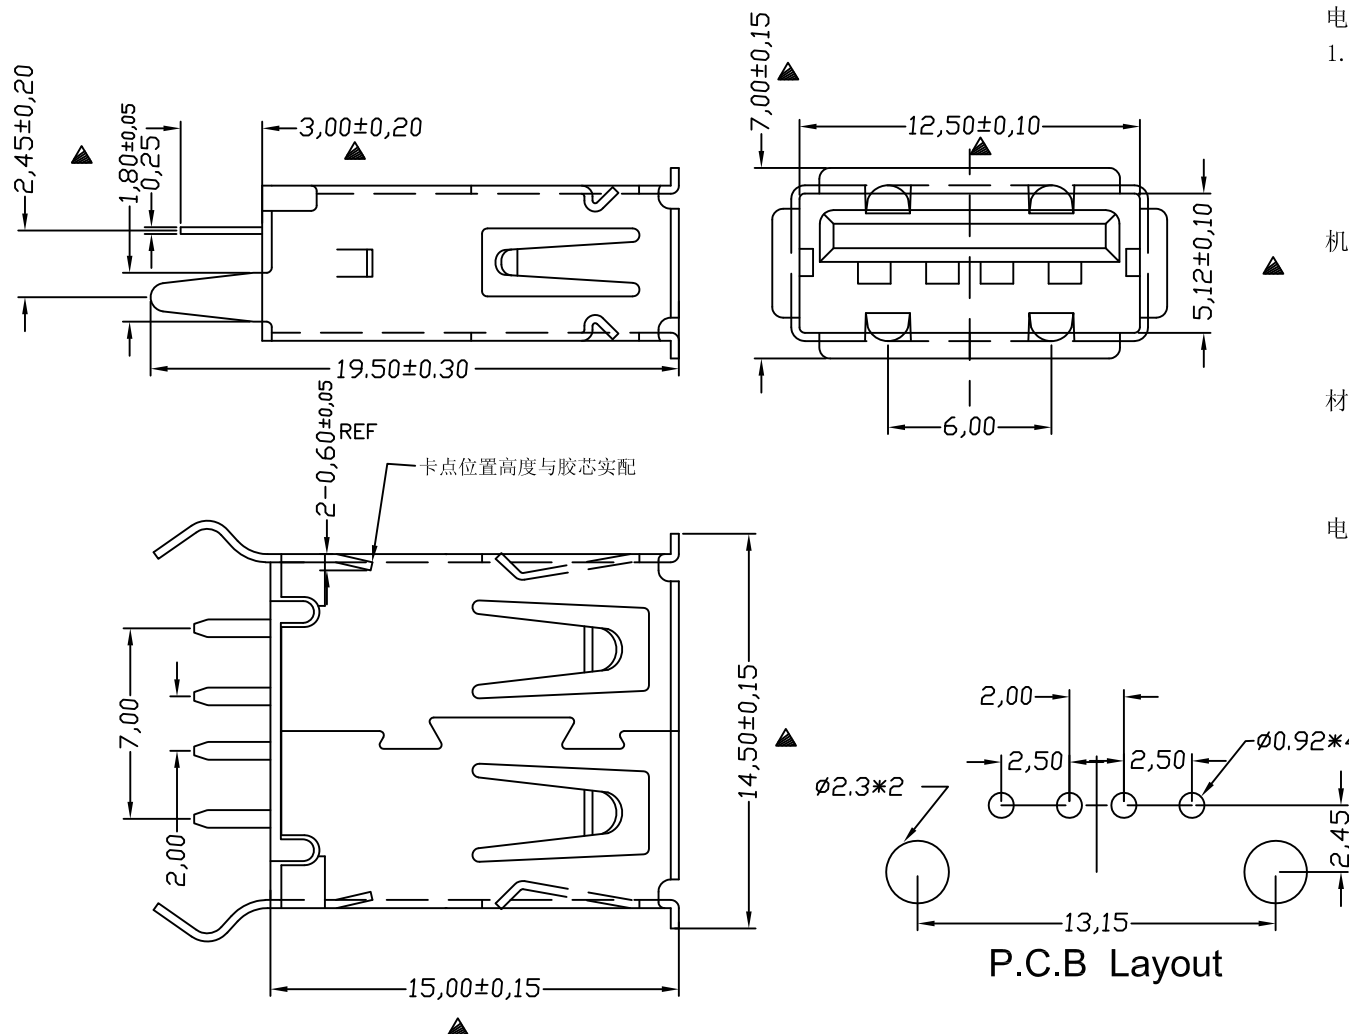

产品规格说明: (specifications)

电器特性: (Electrical characteristics)

1. 接触阻抗: (Contact Resistance)

最大值30毫欧: (30 milliohms MAX)

2. 耐电压: (Dielectric Withstanding Voitage:)

500 伏特交流电 (500V AC AT Sea Lev1)

3. 绝缘阻抗: (Insulation Resistance:)

最小值1000兆欧姆 (1000 mega-ohms MIN)

机械性能: (Mechanical:)

1. 插入力: (Insertion Force)

最大3.57kg (3.57kg MAX)

2. 拔出力: (Unmating Force:)

最少1.02kg (1.02 kg MIN)

材料: Material:

1. 塑胶: (Housing): PBT

2. 端子: (Contact): C2680

3. 外壳: (Shell): C2680

电镀: (Finish):

1. 端子(Contact): Au Plated ON Contact Area Over
50~80U Ni, Sn Plated On Solder Tails.

接触点镀金, 脚镀锡。

接触点镀金 1u'' 脚镀锡。

2. 外壳(Shell): Nickel Plating 镀亮镍80u''

注明: 1. 标示 "▲" 为IPQC重点检测尺寸。

2. 所有物料均须符合RoHS标准。

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.20

.XXX ± 0.10

ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

USB-SDxxSxx-4A-LF
SERIES 4 PIN A TYPE LEADFREE
FEMALE BLANK:G/F
DIP 180° S15:SEMI GOLD 15u"
BK:BLACK S30:SEMI GOLD 30u"
WH:WHITE

DESCRIPTION: USB/180度弯脚插板(15.0)