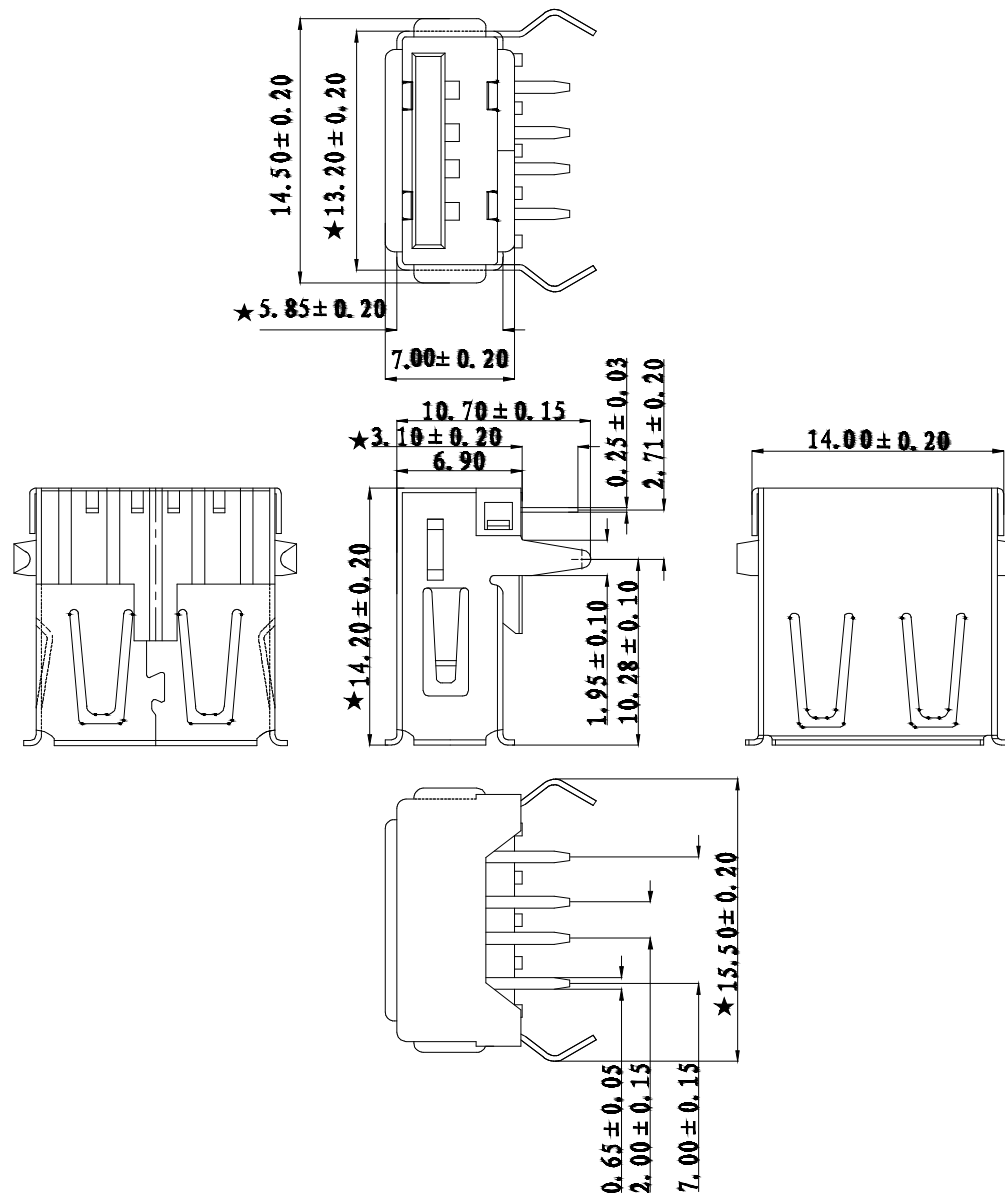


RECOMMENDED PCB LAYOUT

TOP VIEW(TOL:±0.05)

- 1.MATERIAL:**
INSULATOR:PBT UL 94V-0
CONTACT:BRASS;T=0.25MM
SHELL:SPCC;T=0.30MM
- 2.MECHANICAL:**
MATING:35N MAX.
WITHDRAWAL FORCE:10N MIN.
DURABILITY:1500 CYCLES MIN.
- 3.ELECTRICAL:**
CURRENT-MAX[AMPS]:1.5A
VOLTAGE-MAX[VOLTS]:30V
WITHSTANDING VOLTAGE: 500V AC.
CONTACT RESISTANCE [OHMS]:30mΩMAX.
INSULATION RESISTANCE [OHMS]:1000MΩMIN.
- 4.PLATING:**
CONTACTS:GOLD AND TIN OVER NICKEL PLATED
SHELL:NICKEL OVER ALL PLATING
- 5.ENVIRONMENTAL:**
TEMPERATURE RANGE:-55℃ TO +85℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SRBK-4A-LF
SERIES | LEADFREE
4 PIN A TYPE
BLACK
DIP 90°
FEMALE

DESCRIPTION: USB A/F 90 DIP (加蓋彎腳)母座