

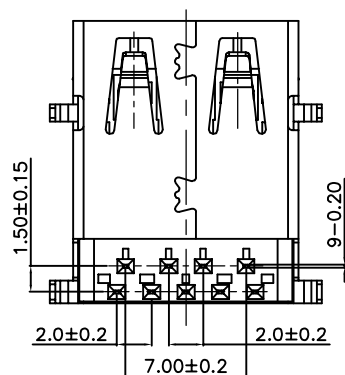



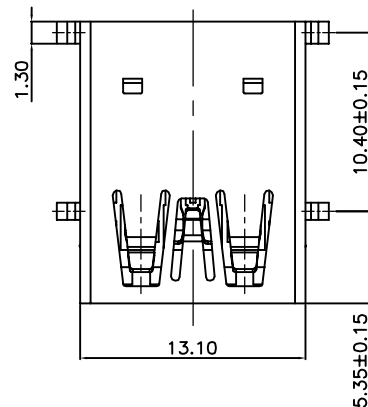

1. Specification:


Current Rating: 1.8 Amp At 250V AC
 Voltage Rating: 30V
 Insulation Resistance: 100MΩ Min.
 Contact Resistance: 30mΩ Max
 Dielectric Withstanding Voltage: 100V AC
 Operating Temperature: -40°C ~ 85°C
 Mating Force: 35N Max.
 Unmated Force: 10N Min (Initial)
 8N Min (After Test)
 Durability: 5,000 Cycles

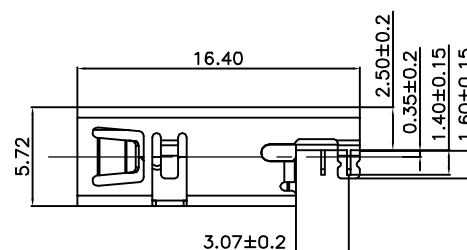

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MicB_SSTX-
7	MicB_SSTX+
8	GND_DRAIN
9	MicB_SSRX-
10	MicB_SSRX+
Shell	Shield

2. Material:

Insulator: PA9T, UL 94 V-0, Blue
 Contact: C5191 (T=0.20 mm)
 Shell: SUS201 (T=0.30 mm)

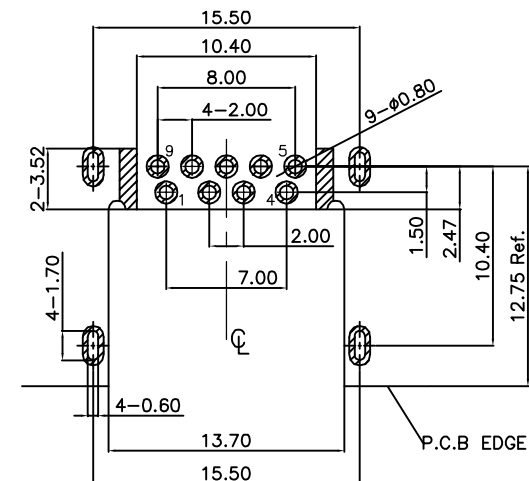

Recommended PCB Layout

Tolerance: 1.2±0.05 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.25
 .XX ± 0.20
 .XXX ± 0.10
 ANG ± 5°

照片框

ORDER INFORMATION

USB-SRF25Z2FXBL-9A-LF
 SERIES LEADFREE
 9 PIN A TYPE
 FEMALE CLIP/2
 DIP 90° OFFSET 2.5mm
 BLUE
 NON FLANGE

DESCRIPTION: USB 3.0 AF, Sinking, Dip, R/A, L=16.40 mm