
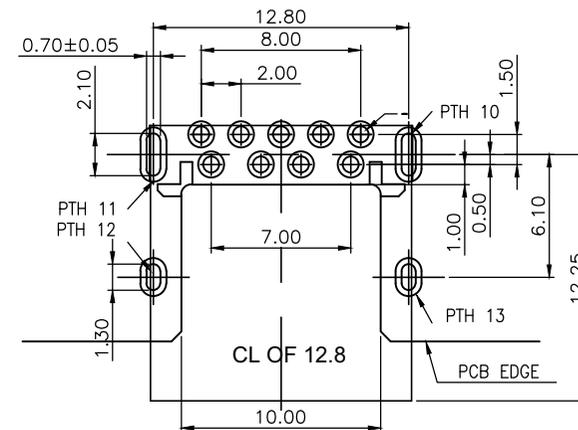
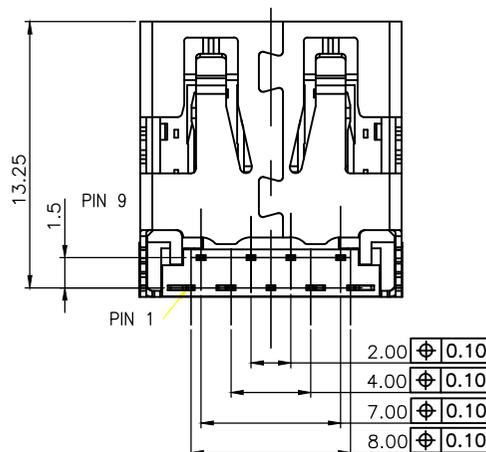



Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MicB_SSTX-
7	MicB_SSTX+
8	GND_DRAIN
9	MicB_SSRX-
10	MicB_SSRX+
Shell	Shield

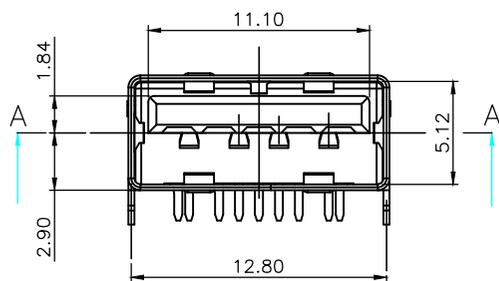

TOLERANCE: ±0.05, THICKNESS: 1.2mm
RECOMMENDED PCB LAYOUT

(TOP VIEW)

KEEP OUT AREA

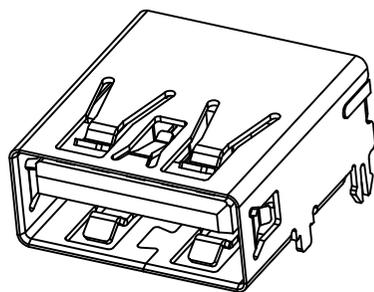

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

照片框

ORDER INFORMATION

USB-SRFXMM57BL-9A-LF
SERIES | | | | | LEADFREE
FEMALE | | | | | 9 PIN A TYPE
DIP 90° | | | | | BLUE
NON FLANGE | | | | | HIGH 5.7mm
METAL FOOT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: