
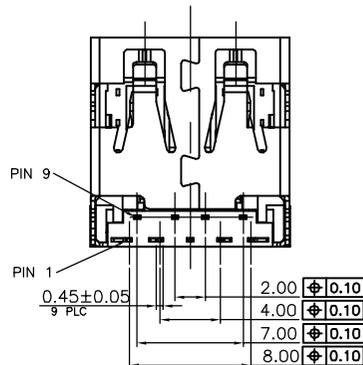
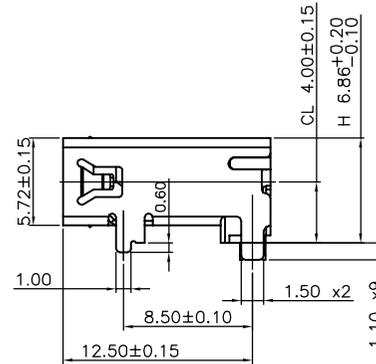


SECTION A-A

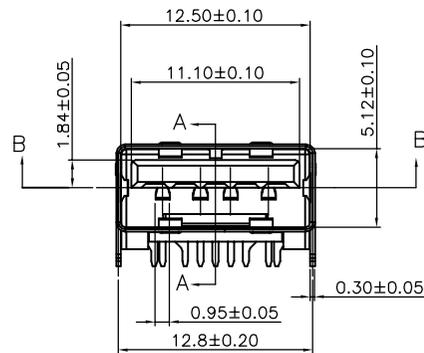

2.00	±0.10
4.00	±0.10
7.00	±0.10
8.00	±0.10

NOTE:

1. MATERIAL:

- 1.1 INSULATOR:LCP UL 94 V-0;BLACK/BLUE
- 1.2 CONTACT:COPPER ALLOY(T=0.20mm)
- 1.3 SHELL:SUS201(T=0.30mm)
- 1.4 MYLAR:POLYIMIDE TAPE

2. ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACTRESISTANCE:30mΩ Max
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R. M. S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
- 2.5 OPERATING TEMPERATURE:-40° C ~ 85° C

3 MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE:35 N Max
- 3.2 UNMATED FORCE:10 N Min INITIAL; 8 N Min AFTER TEST
- 3.3 DURABILITY:5,000 CYCLES

4. PLATING

- 4.1 TERMINAL CONTACT: GOLD(SEE TAB) PLATING ALL OVER 50u" MIN NICKEL ON CONTACT AREA AND 80u"MIN MATTE-TIN ALL OVER
- 4.2 SHELL:50u"MIN.NICEL ALL OVER

Pin #	SIGNALNAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SRX-
6	StdA_SRX+
7	GND_DRAIN
8	StdA_SX-
9	StdA_SX+
Shell	Shield

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION



煜倫股份有限公司

www.morethanall.com

DESCRIPTION: USB 3.0 AF STD CL4.00mm H6.86 L13.7mm DIP TYPE CONN