
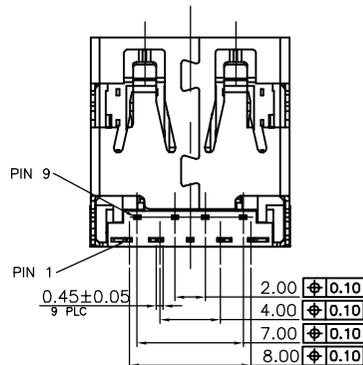
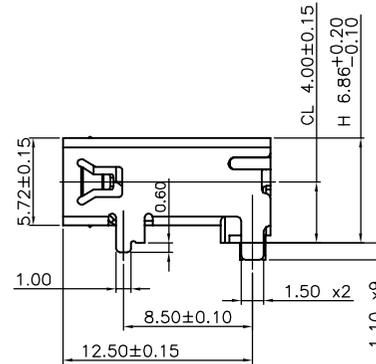


SECTION A-A

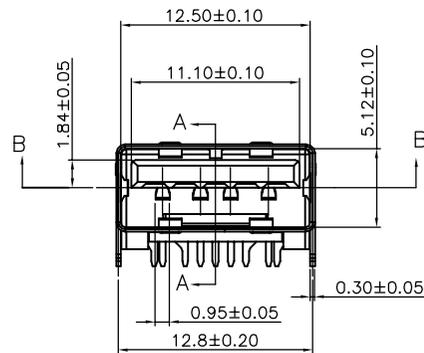

NOTE:

1. MATERIAL:

- 1.1 INSULATOR: LCP UL 94 V-0; BLACK/BLUE
- 1.2 CONTACT: COPPER ALLOY (T=0.20mm)
- 1.3 SHELL: SUS201 (T=0.30mm)
- 1.4 MYLAR: POLYIMIDE TAPE

2. ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACT RESISTANCE: 30mΩ Max
- 2.2 CONTACT CURRENT RATING: 1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
- 2.5 OPERATING TEMPERATURE: -40° C ~ 85° C

3. MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE: 35 N Max
- 3.2 UNMATED FORCE: 10 N Min INITIAL; 8 N Min AFTER TEST
- 3.3 DURABILITY: 5,000 CYCLES

4. PLATING

- 4.1 TERMINAL CONTACT: GOLD (SEE TAB) PLATING ALL OVER 50u" MIN NICKEL ON CONTACT AREA AND 80u" MIN MATTE-TIN ALL OVER
- 4.2 SHELL: 50u" MIN. NICKEL ALL OVER

Pin #	SIGNALNAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SRX-
6	StdA_SRX+
7	GND_DRAIN
8	StdA_SX-
9	StdA_SX+
Shell	Shield

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1:1

.XXX ±

DATE

ANG ±

SIZE A4

P PROJECTION

照片框




ORDER INFORMATION

USB-SRFXMM68BLR-9A-LF
SERIES | | | | | | | | | | LEADFREE
9 PIN A TYPE
FEMALE | | | | | | | | | | REEL
DIP 90° | | | | | | | | | | BLUE
NON FLANGE | | | | | | | | | | METAL FOOT
HIGH 6.86mm

DESCRIPTION: USB 3.0 AF STD CL4.00mm H6.86 L13.7mm DIP TYPE CONN

煜倫股份有限公司

www.morethanall.com

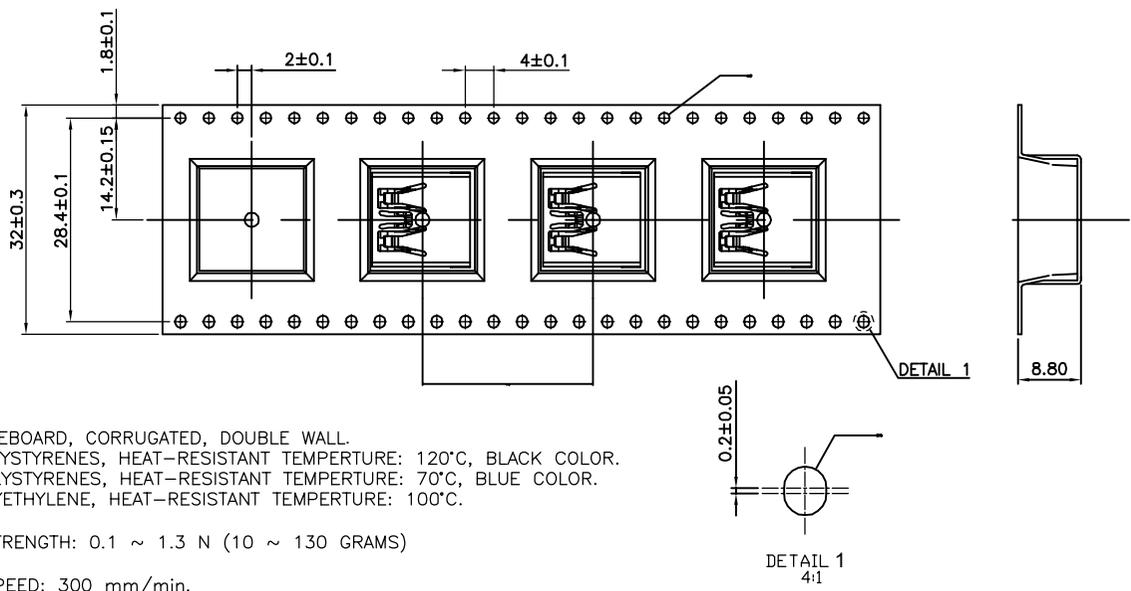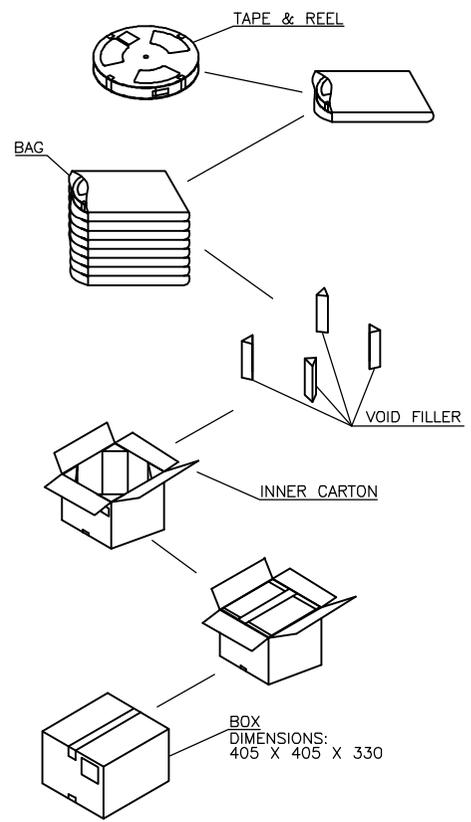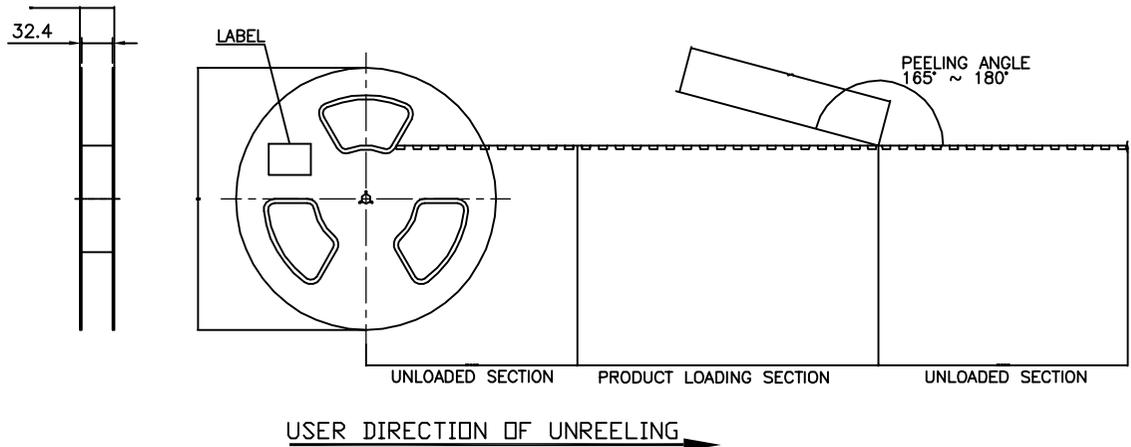

NOTE:

- MATERIAL:
 BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

400	8	3200 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

USB-SRFXMM68BLR-9A-LF
 SERIES | | | | | | | | | | LEADFREE
 | | | | | | | | | | 9 PIN A TYPE
 FEMALE | | | | | | | | | | REEL
 DIP 90° | | | | | | | | | | BLUE
 NON FLANGE | | | | | | | | | | METAL FOOT
 HIGH 6.86mm

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	

DESCRIPTION: