

P.C.B LAYOUT

SPECIFICATIONS

Electrical:

- 1.Rating: 30V, 1.5A
- 2.Contact Resistance: 30 mΩ Max
- 3.Dielectric Withstanding Voltage: 500 V AC
- 4.Insulation Resistance: 1000 MΩ Min

Mechanical:




- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 3.57 Kgf (Max)
 - 1.2 Unmate force: 1.0 Kgf (Min)

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

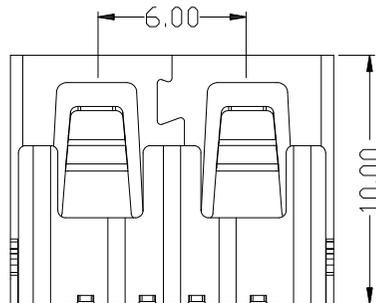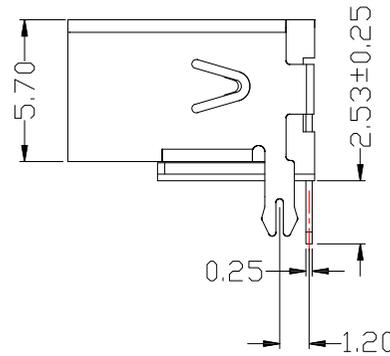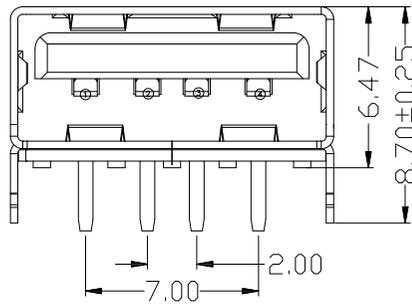

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

PPOJECTION

照片框

ORDER INFORMATION

USB-SRFXZ64xx-4A-LF
SERIES | | | LEADFREE
| | | 4 PIN A TYPE
FEMALE | | | BK:BLACK
DIP 90° | | | WH:WHITE
NON FLANGE | | | HIGH 6.47mm
CLIP/2

DESCRIPTION: USB AF 短體10.0 後2 腳插板 無捲邊 H6.47

煜倫股份有限公司

www.morethanall.com