
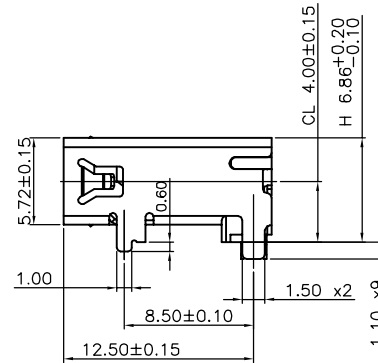
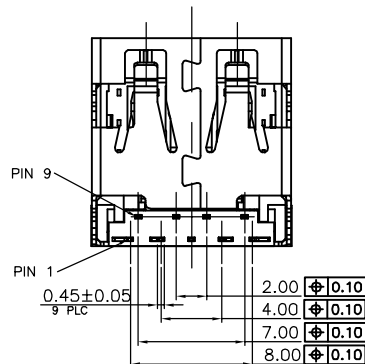


SECTION A-A

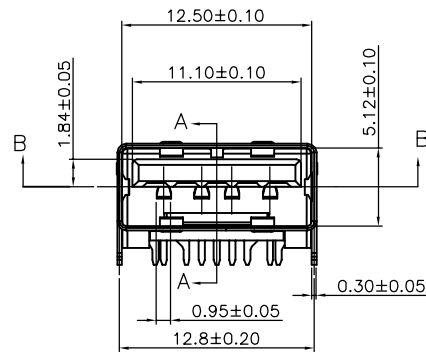

NOTE:

1. MATERIAL:

- 1.1 INSULATOR:LCP UL 94 V-0;BLACK/BLUE
- 1.2 CONTACT:COPPER ALLOY(T=0.20mm)
- 1.3 SHELL:SUS201(T=0.30mm)
- 1.4 MYLAR:POLYIMIDE TAPE

2. ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACT RESISTANCE:30mΩ Max
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
- 2.5 OPERATING TEMPERATURE:-40° C ~ 85° C

3. MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE:35 N Max
- 3.2 UNMATED FORCE:10 N Min INITIAL; 8 N Min AFTER TEST
- 3.3 DURABILITY:5,000 CYCLES

4. PLATING

- 4.1 TERMINAL CONTACT: GOLD(SEE TAB) PLATING ALL OVER 50u" MIN NICKEL ON CONTACT AREA AND 80u" MIN MATTE-TIN ALL OVER 50u" MIN NICKEL ON SOLDER AREA
- 4.2 SHELL:50u" MIN. NICKEL ALL OVER

Pin #	SIGNALNAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SRX-
6	StdA_SRX+
7	GND_DRAIN
8	StdA_STX-
9	StdA_STX+
Shell	Shield

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SRMMFX68BLR-9A-LF

SERIES

FEMALE

DIP 90°

METAL FOOT

LEADFREE

9 PIN A TYPE


REEL

BLUE

HIGH 6.86mm

NON FLANGE

DESCRIPTION: USB 3.0 AF STD CL4.00mm H6.86 L13.7mm DIP TYPE CONN

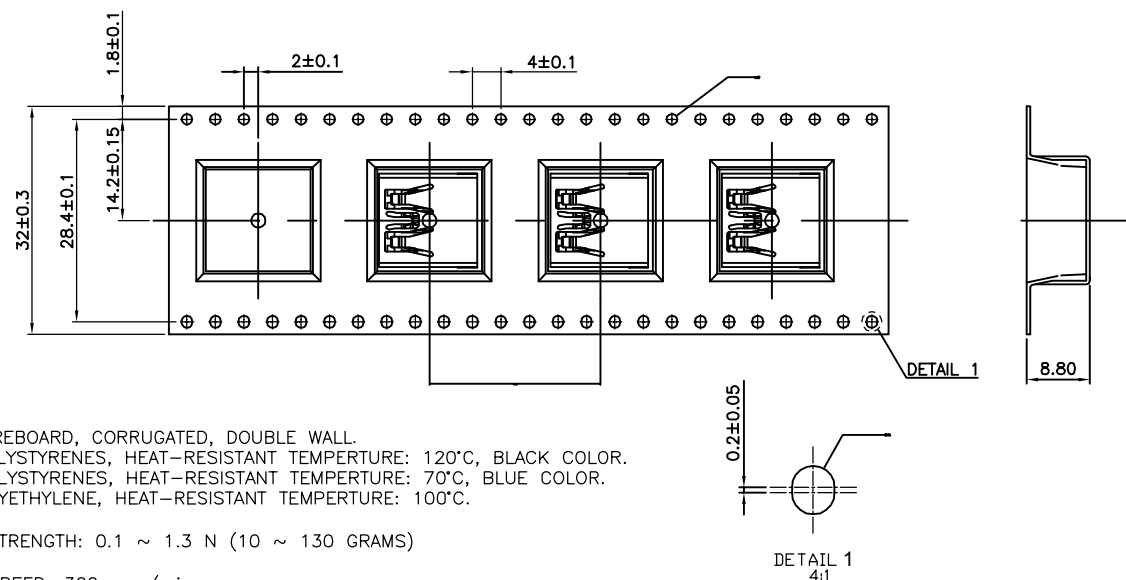


1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
2. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
3. PEELING SPEED: 300 mm/min.
4. EACH BAG SHALL BE INCLUDED DESICCANT.

400	8	3200 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT



照片框

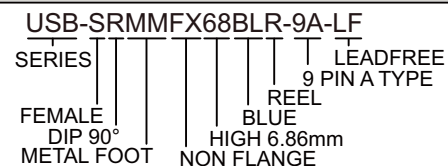

DESCRIPTION: