


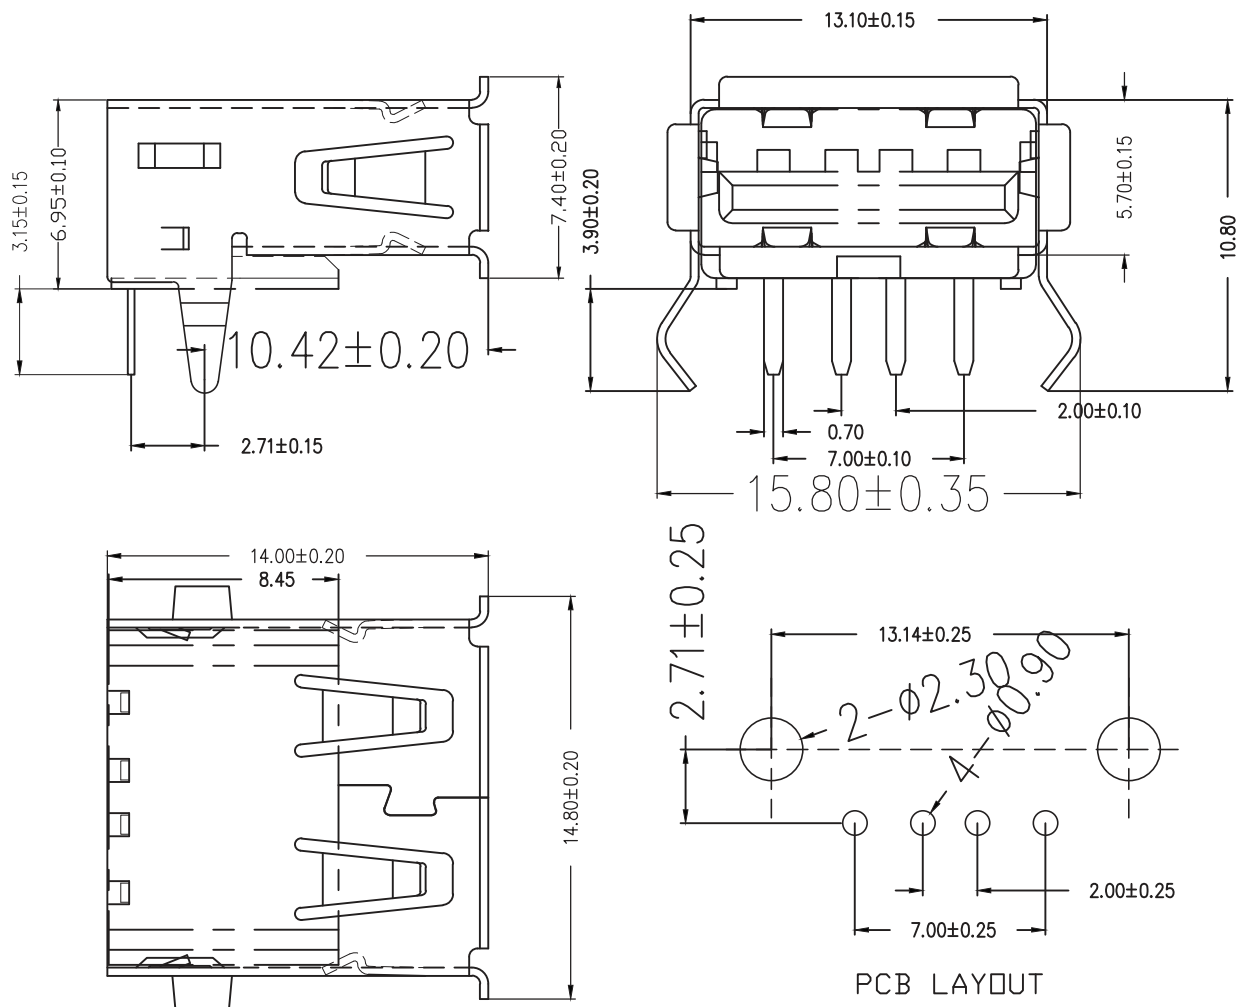

#### NOTES:

Housing: Thermoplastics, UL94V-0

Contact: Copper Alloy

SHELL: CPCC T=0.30mm

Voltage Current Rating: 1.5 AMP. 30V AC

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 30 MΩ Max.

Dielectric Withstanding Voltage: 500V AC

Temperature Range: -35°C to +85°C

Insulator color: Black

Plastic material: PBT/LCP/Others

Shell finish: Nickel plated/Tin-Lead plated

Mechanical:

Mating Force: 3.5KG MAX

Unmating Force: 0.7 KG MIN.

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±  
.X ± 0.30  
.XX ± 0.25  
.XXX ± 0.10  
ANG ± 5°

PPOJECTION



#### ORDER INFORMATION

USB-SRRVBK-4A-LF  
SERIES | | | LEADFREE  
4 PIN A TYPE  
BLACK  
REVERSED  
DIP 90°  
FEMALE

DESCRIPTION: USB A FEMALE RIGHT ANGLE(反向90°)