

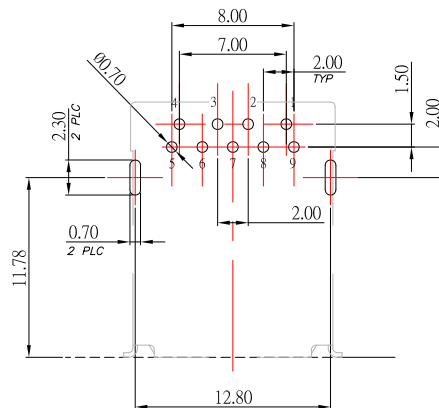
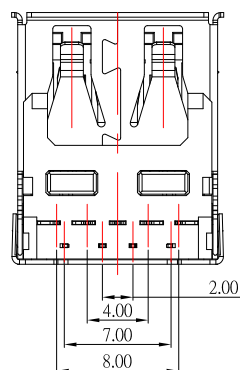



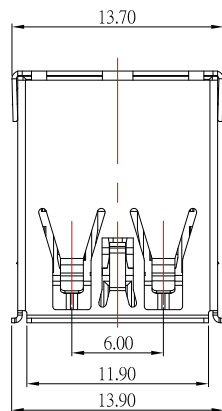

RECOMMENDED PCB LAYOUT

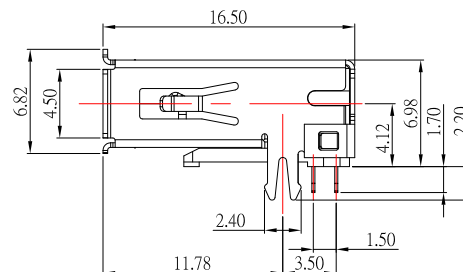

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

NOTE:

1.MATERIAL:

- 1.1 Housing: LCP,UL94V-0
- 1.2 Contact: Phosphor Bronze
- 1.3 Shell: SUS

2.Finish:

- 2.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

- 2.2 Shell: Nickel under Plated surface layer

3.SPECIFICATION:

- 3.1 Rating: 1.5A
- 3.2 Insulator Resistance:100M Ω Min
- 3.3 Dielectric Strength: 100V AC
- 3.4 Contact Resistance: 30m Ω Max
- 3.5 Operation Temperature: -40°C ~ +85°C
- 3.6 Insertion Force: 35 N
- 3.7 Extraction Force: 10 N

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°



ORDER INFORMATION

USB-SRRVZBL-9A-LF
SERIES LEADFREE
FEMALE CLIP REVERSED
DIP 90°
BLUE
9 PIN A TYPE

DESCRIPTION: USB AF 3.0 插板 捲邊 膠芯反向 魚叉