

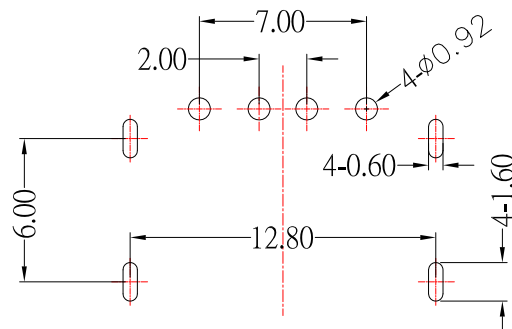
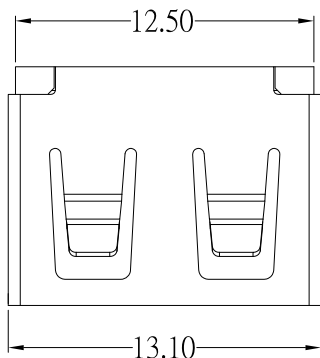
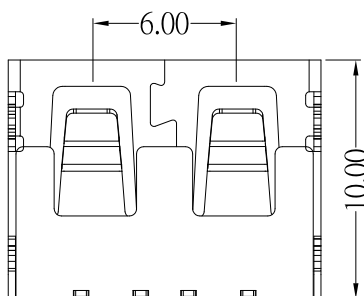


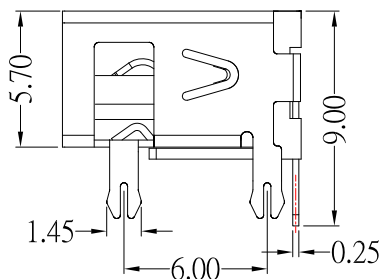

P.C.B LAYOUT MOUNTING PATTERN

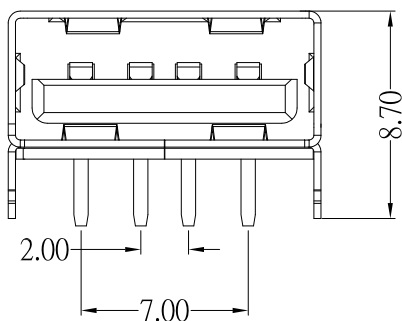

SPECIFICATIONS

Electrical:

- 1.Contact Resistance: 30 mΩ Max
- 2.Dielectric Withstanding Voltage: 500 V AC / 1 minute
- 3.Insulation Resistance: 1,000 MΩ Min

Mechanical:

- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 35 N (Max)
 - 1.2 Unmate force: 10N (Min)

Material:

- 1.Housing: PBT
- 2.Contact: Copper Alloy
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

RoHS Compliant

TOLERANCES ARE

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



ORDER INFORMATION

SUB-SRRVZZFXBK-4A-LF			
SERIES			LEADFREE
			4 PIN A TYPE
			BLACK
FEMALE		NON FLANGE	
DIP 90°		CLIPX2	
		REVERSED	

DESCRIPTION: USB AF 短體 10.0 無捲邊 4腳 反向

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com