


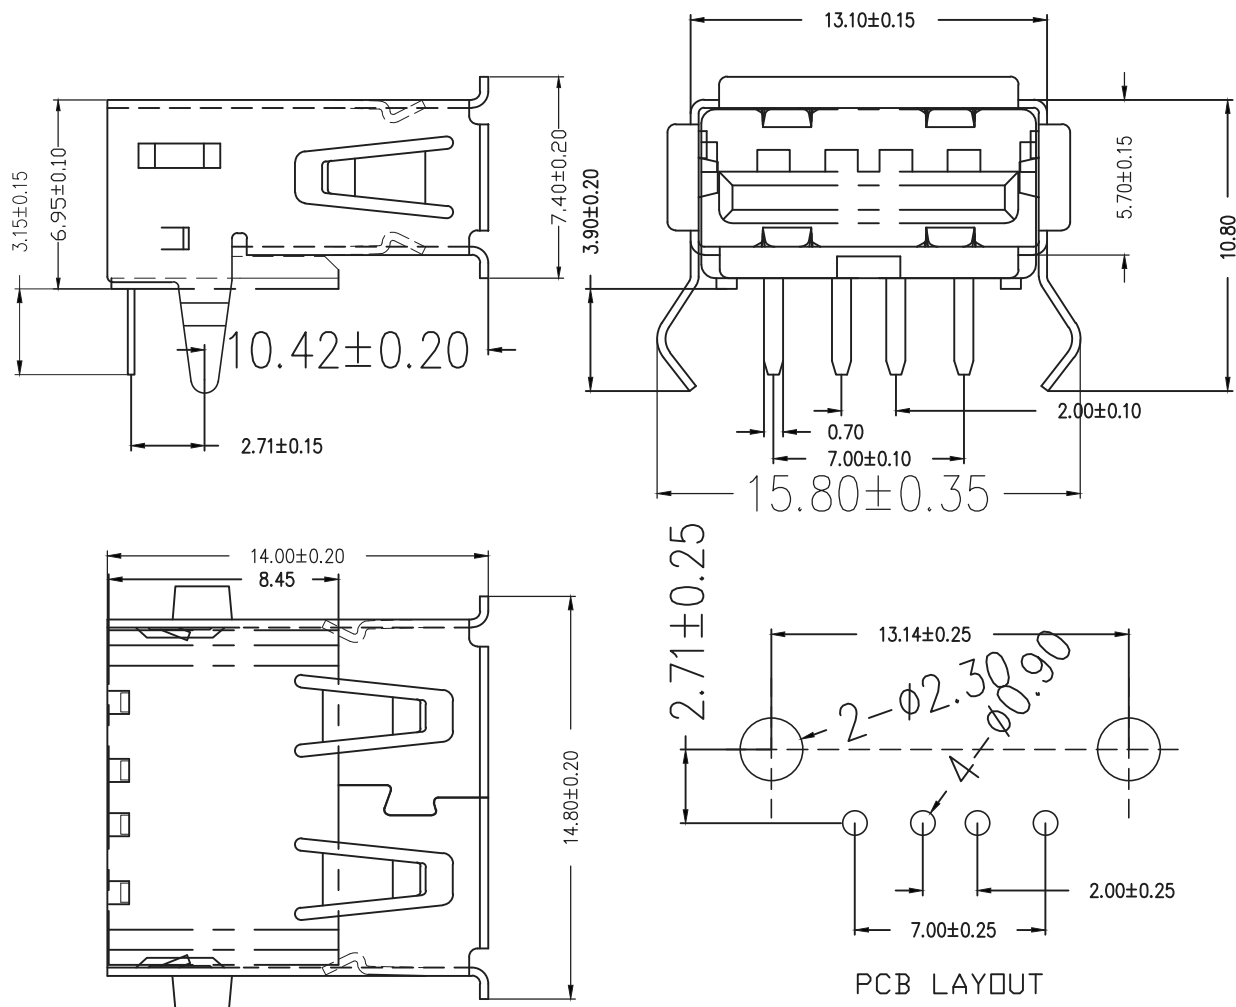

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

SHELL: CPCC T=0.30mm

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35°C to +85°C

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.10
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

USB-SRRVxx-4A-LF
SERIES | | | LEADFREE
FEMALE | | | 4 PIN A TYPE
DIP 90° | | | BK:BLACK
REVERSED | | | WH:WHITE

DESCRIPTION: USB A FEMALE RIGHT ANGLE(反向90°)