
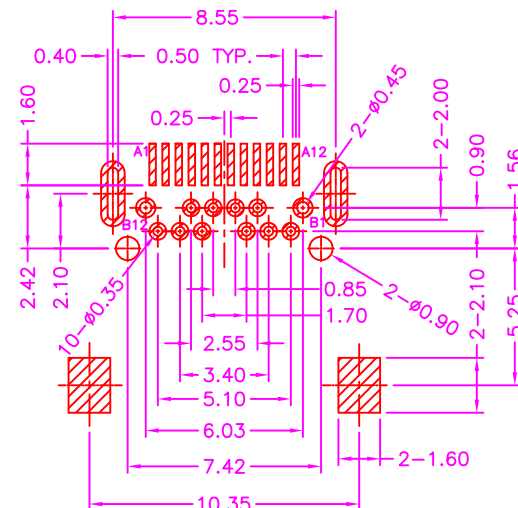
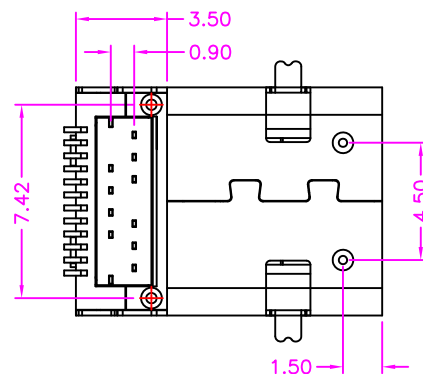
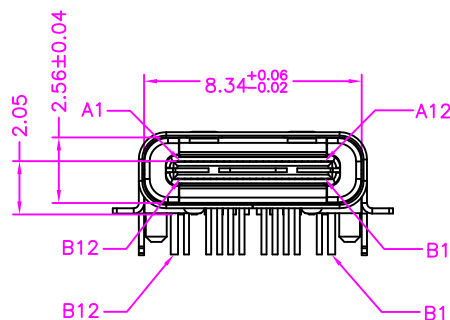
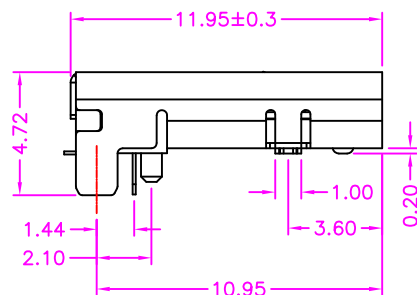



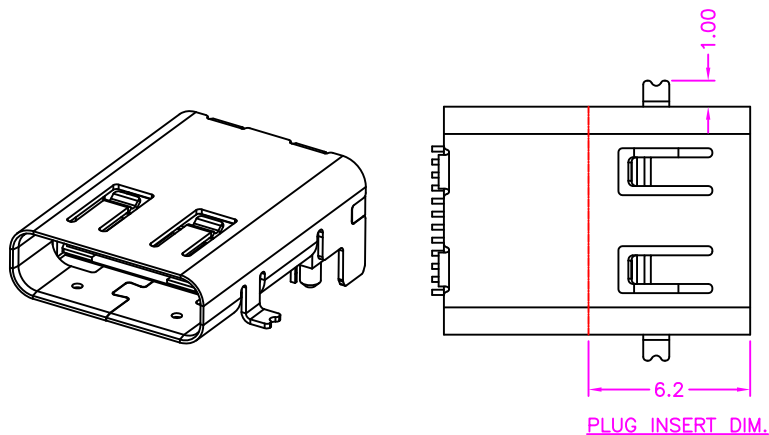

P.C.B. LAYOUT
TOP VIEW±0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TOP SHELL: STAINLESS STEEL, NICKEL PLATING
SHELL: STAINLESS STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING:
1.5A FOR VBUS (A4,A9,B4,B9)
1.25A FOR VCONN (B5)
1.25A FOR GND (A1,A12,B1,B12)
0.25A FOR ALL THE OTHERS CONTACTS
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE:
40m OHMS MAX INITIAL
50m OHMS MAX AFTER ENVIRONMENTAL TEST
INSULATION RESISTANCE: 100M OHMS MIN AT DC 300V
OPERATION TEMPERATURE: -40°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SRWEPMs-24C-LF
SERIES
FEMALE
DIP 90°
90°SMT
LEADFREE
24 PIN C TYPE
W/SPRING
METAL FOOT
POST
EAR

DESCRIPTION: USB C TYPE, PCB MOUNT, SMT, METAL SHIELD, WITH POST, 24PIN, FEMALE