
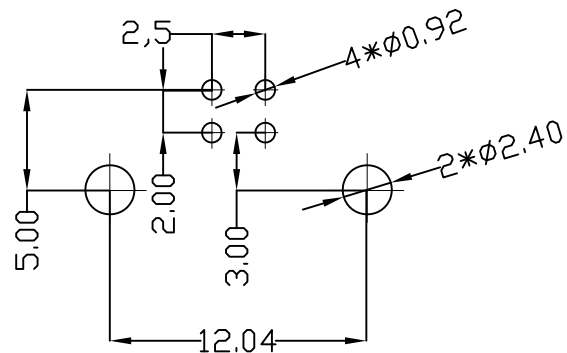


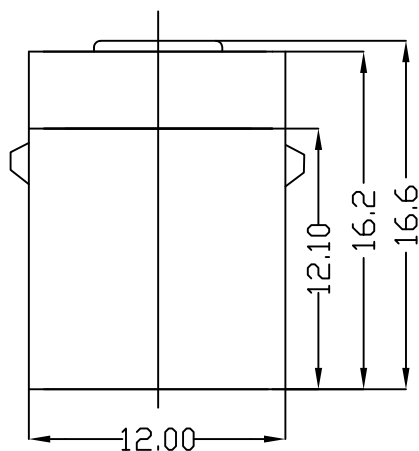

RECOMMEND PCB LAYOUT ± 0.05

Material:

A. Insulator : PBT.G.F. UL94-V0

B. Contact : BRASS



C. Shell : IRON.

D. Finish :

Contact = Gold plated on contact area &
Tin plated on terminal area

Shell = Nickel plated.

Color: White

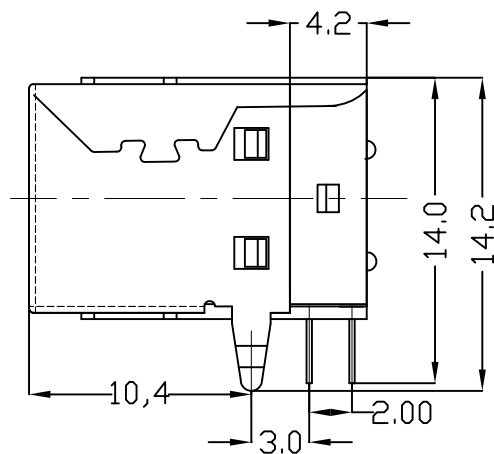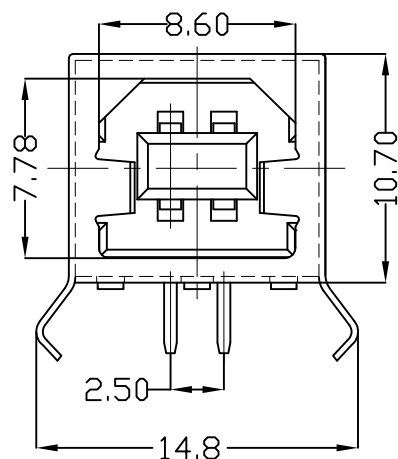

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.45


.X ± 0.30

.XX ± 0.20

.XXX $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

USB-SRWH-4B-LF
SERIES | | LEADFREE
| | 4 PIN B TYPE
| WHITE
DIP 90°
FEMALE

DESCRIPTION: