

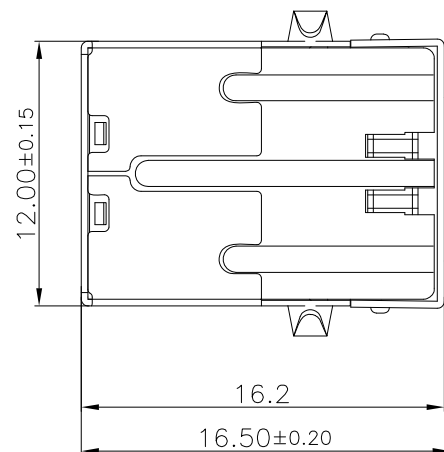
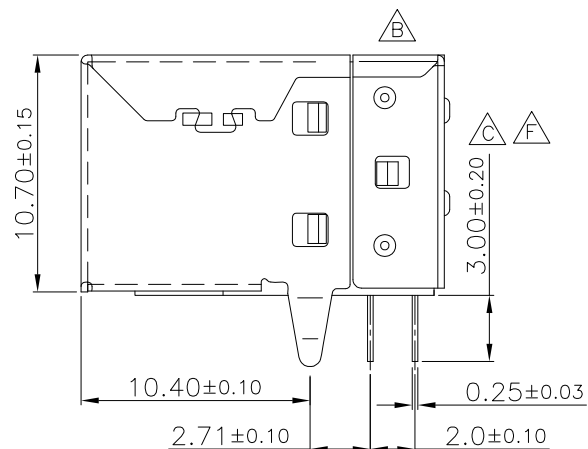
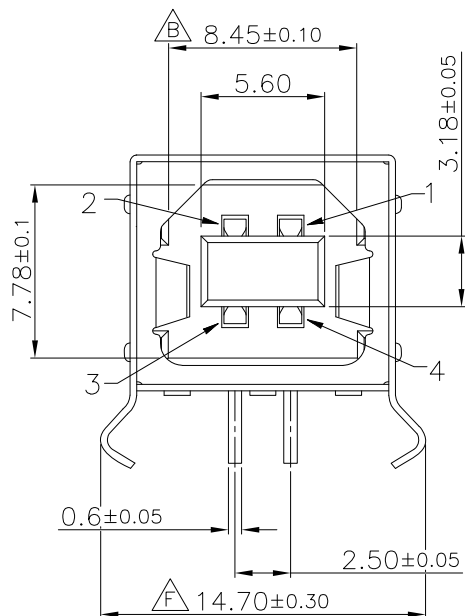


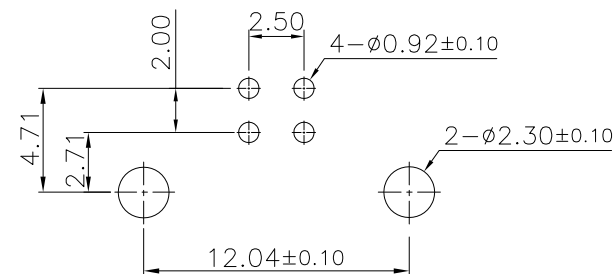

Specifications:
 Current Rating:1.5A AC/DC $\triangle B$
 Voltage Rating:30V AC/DC
 Contact Resistance:30m ohm. Max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-50°C ~ +85°C $\triangle B$

Material and Finish
 Insulator:PBT or Nylon 9T (UL94V-0) $\triangle F$
 Contact:Phosphor Bronze
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Brass,Nickel Plated
 Back Cover:SPCC, Matte Nickel Plated



P.C.B Layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±




PPOJECTION

照片框



ORDER INFORMATION

USB-SRWHS30-4B-LF
 SERIES LEADFREE
 4 PIN B TYPE
 SEMI GOLD 30u"
 WHITE
 DIP 90°
 FEMALE

DESCRIPTION: USB B Type PCB Socket Right Angle Type

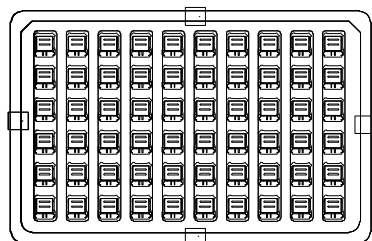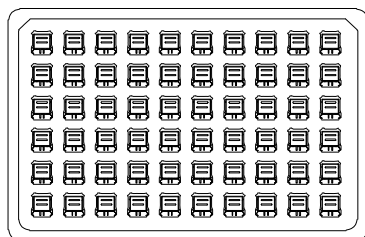

16*2 TRAY

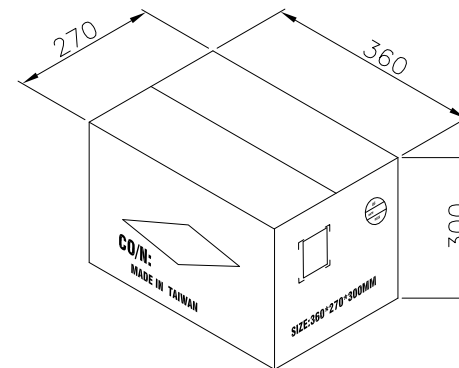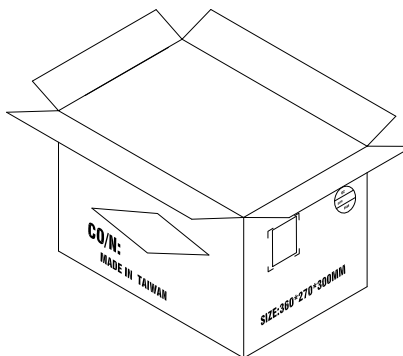

CARTON

Note:

1.Dimension:

Carton Size:360X270X300 (mm)

2.QuANTITY:

60 Pcs/Tray

32 Tray/Carton

Q'TY: 1920pcs

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ± 0.20

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SRWHS30-4B-LF

SERIES

LEADFREE

4 PIN B TYPE

SEMI GOLD 30u"

WHITE

DIP 90°

FEMALE

DESCRIPTION: USB B Type PCB Socket Right Angle Type