






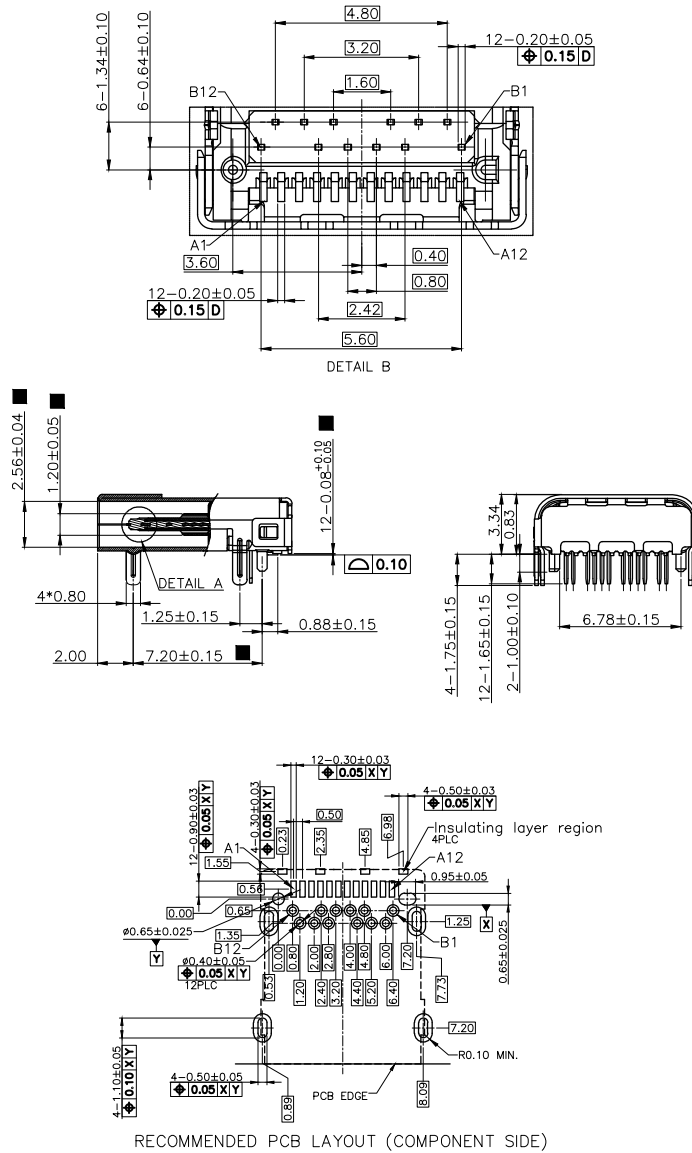


3.3 DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

DESCRIPTION: TYPE C母座板上前插后贴L=10.85

DESCRIPTION: TYPE C母座板上前插后贴L=10.85

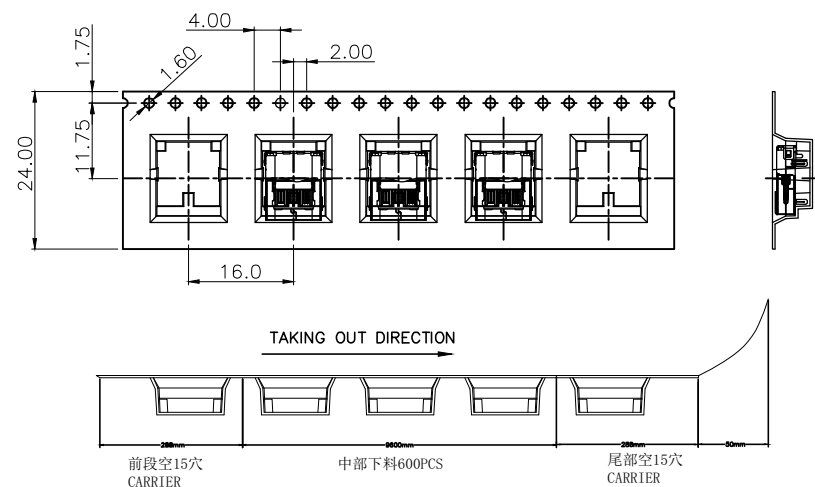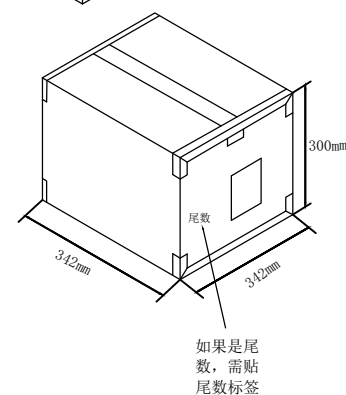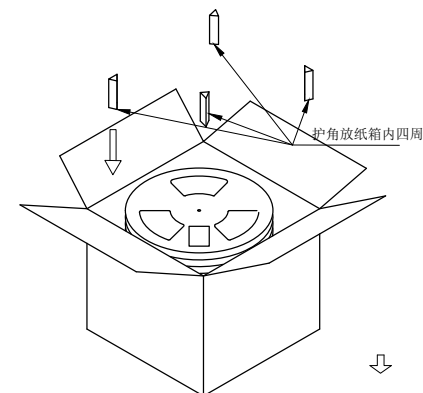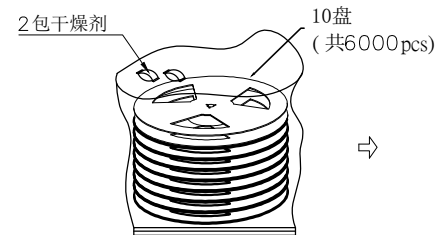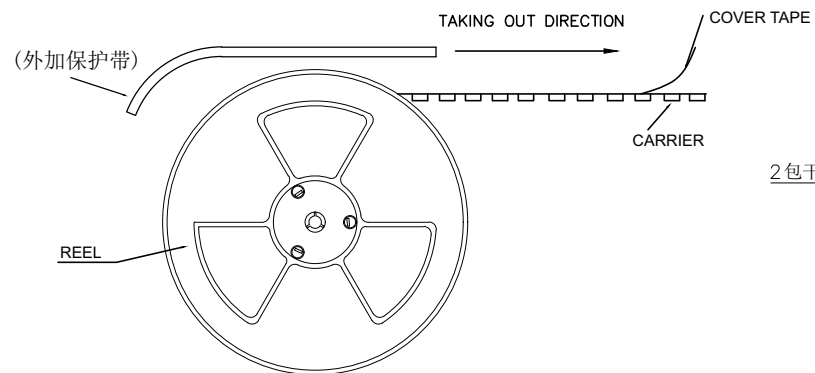

Notes:

1. 每卷前后各空15PCS. 尾部用美纹胶纸封住,
2. 然后再卷一圈保护带, 保护带最后重叠约50MM, 用美纹胶纸将其封住
3. 每10卷盘装入一个防水袋, 然后放入1个外箱; 纸箱内四周放护角;
4. 在搬运过程中要轻拿轻放.
5. 在运输中不可堆放过多, 不可有重压现象.
6. 跌落测试条件:
成品箱子从1.5米高自由落体: (三棱六面一角) 检验项目: 1. 产品不可跑出下带凹槽.
2. 产品不可有摔伤, 变形.
3. 外箱及内包装材料不可严重破损.

产品			6K
PE袋			1PCS
三角柱			4PCS
干燥剂			2PCS
COVER TAPE		21.0mm	若干
REEL		24.0mm	10R
纸箱	CA-05002-00	双坑K=K 342*342*300	1
品名		规格 (mm)	用量 (PCS)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.30
X, ± 0.25
.XX ± 0.20
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SRWMM8982PER-24C-LF
SERIES
FEMALE
DIP 90°
90°SMT
REEL
EAR
POST
METAL FOOT 8.94mm/8.26mm
LEADFREE
24 PIN C TYPE

DESCRIPTION: TYPE C母座板上前插后贴L=10. 85