

NOTES:

- 1.HOUSING: SEE NOTES, UL94V-0 .
- TERMINAL: SEE NOTES.
- SHELL: SEE NOTES.

SPECIFICATION:

1.ELECTRICAL CHARACTERISTIC:

- CONTACT RESISTANCE: 30MΩ MAX
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
- INSULATION RESISTANCE: 1000MΩ MIN


2.MECHANICAL CHARACTERISTIC:

- INSERTION FORCE: 35N(3.57KGF) MAX
- EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
- DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
- 5000 CYCLES EXTRACTION

FORCE: 3~35N

3.ENVIRONMENTAL:

- OPERATING TEMPERATURE: -55℃+85℃

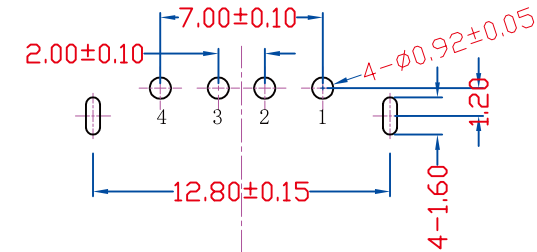

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.25

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1:1

.XX ± 0.15

.XXX ± 0.10

DATE

ANG ±

照片框

煜倫股份有限公司

ORDER INFORMATION

USB-SRZ112BK100-4A-LF
SERIES | | | | LEADFREE
FEMALE | | | | 4 PIN A TYPE
DIP 90° | | | | LONG 10.0mm
CLIP | | | | FOOTPRINT 1.20mm
BLACK

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: USB A/F 10.0有边两脚鱼叉 (方弹)