
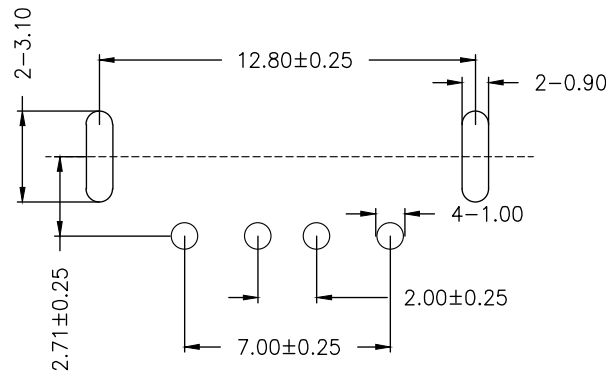
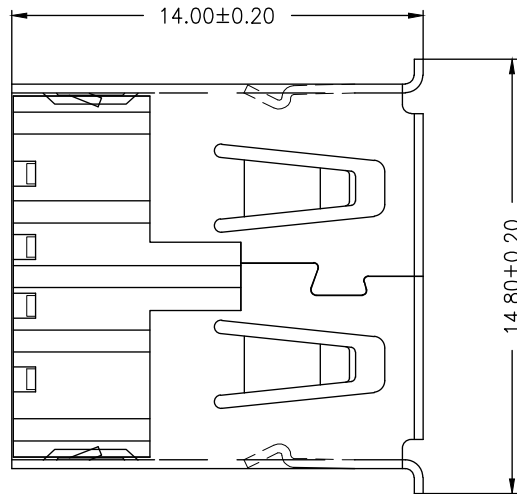
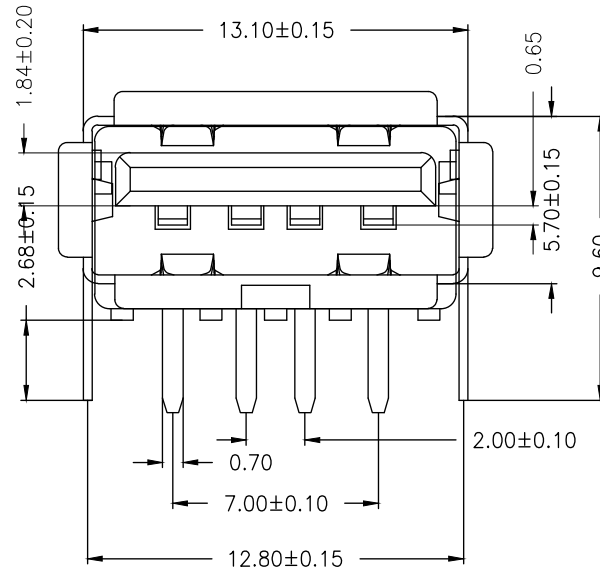


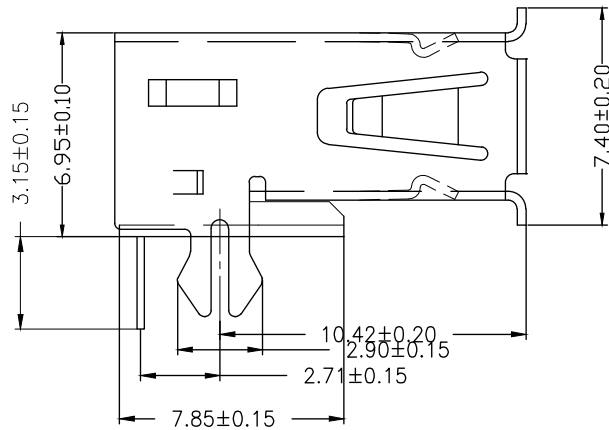

PCB LAYOUT

#### NOTES:

Housing: Thermoplastics,UL94V-0  
 Contact: Copper Alloy  
 Shell: Copper Alloy/Steel  
 Voltage Current Rating:1.5 AMP. 30V AC  
 Insulation Resistance:1000M $\Omega$  Min.  
 Contact Resistance:30 M $\Omega$  Max.  
 Dielectric Withstanding Voltage:500W AC  
 Temperature Range:-35°C to +85°C  
 Insulator color: Black/White  
 Plastic material:PBT/LCP/Others  
 Shell finish:Nickel plated/Tin-Lead plated  
 Mechanical:  
 Mating Force:3.5KG MAX  
 Unmating Force:0.7 KG MIN.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.  $\pm$  0.25  
 .X  $\pm$  0.20  
 .XX  $\pm$  0.15  
 .XXX  $\pm$  0.10  
 ANG  $\pm$

PPOJECTION

照片框

#### ORDER INFORMATION

USB-SRZ1xx-4A-LF  
 SERIES | | | LEADFREE  
 | | | 4 PIN A TYPE  
 | | | BK:BLACK  
 | | | WH:WHITE  
 FEMALE | CLIP  
 | DIP 90°

DESCRIPTION: