
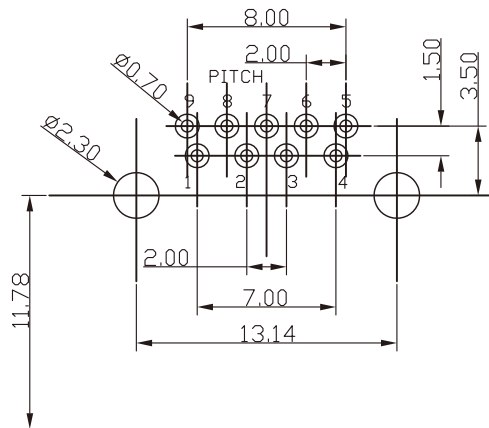
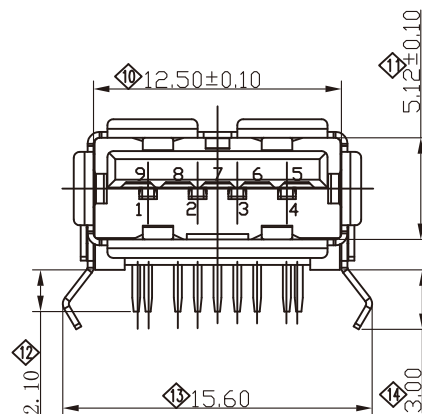


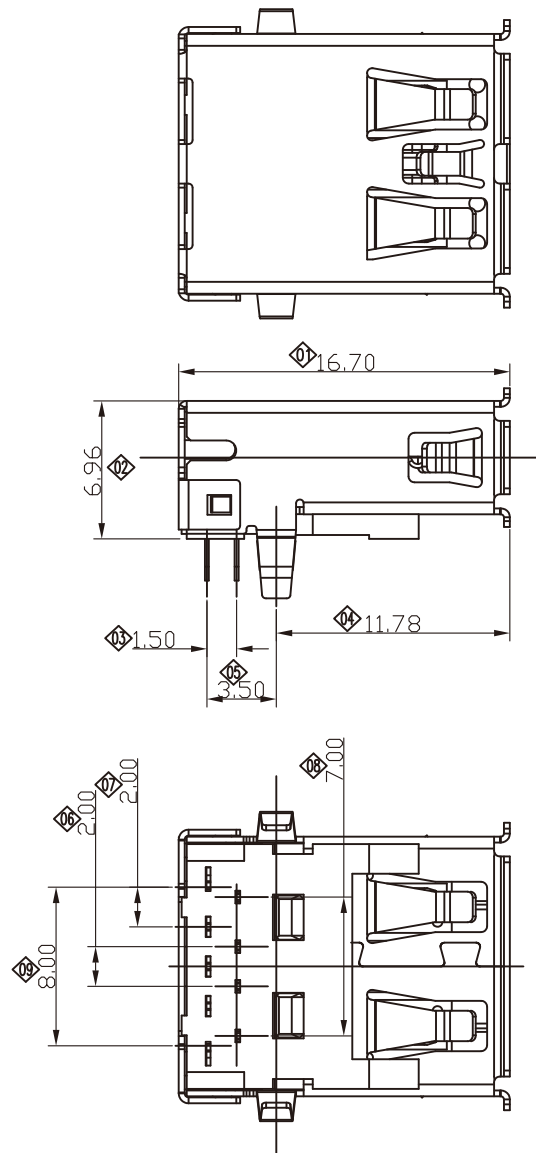

RECOMMENDED PCBA LAYOUT
(TOLERANCE+/-0.05)

NOTE:

1.MATERIAL:

1.1 INSULATOR:HIGH TEMPERATURE PLASTIC UL 94 V-0

1.2 CONTACT:BRONZE(T=0.20mm)

1.3 SHELL:BRASS(T=0.30mm)

2.ELECTRICAL CHARACTERISTICS:

2.1 CONTACT RESISTANCE:30mΩ Max

2.2 CONTACT CURRENT RATING:1.5A

2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.

2.4 INSULATION RESISTANCE 100 MEGOHMS Min

2.5 OPERATING TEMPERATURE:-40°C ~ 85°C

3 MECHANICAL CHARACTERISTICS:

3.1 MATING FORCE:35 N Max

3.2 UNMATED FORCE:10 N Min INITIAL; 8 N Min AFTER TEST

3.3 DURABILITY:5,000 CYCLES

4.PLATING

4.1 TERMINAL CONTACT:(SEE TAB) GOLD PLATING ALL

OVER 50u" MIN NICKEL AND 80u"MIN Matte Tin ALL OVER 50u" MIN NICKEL IN SOLDER AREA

4.2 SHELL:50u"MIN. NICKEL ALL OVER

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X ± 0.30

.X ± 0.25

.XX ± 0.20

.XXX ± 0.10

ANG ± 5°

照片框

ORDER INFORMATION

USB-SRcc-9A-LF
SERIES | LEADFREE
9 PIN A TYPE
FEMALE | BL:BLUE
BK:BLACK
WH:WHITE
DIP 90°

DESCRIPTION: USB3.0 AF DIP90° (T=0.3) 弯脚