
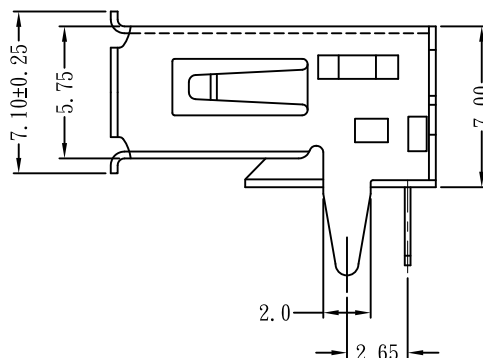
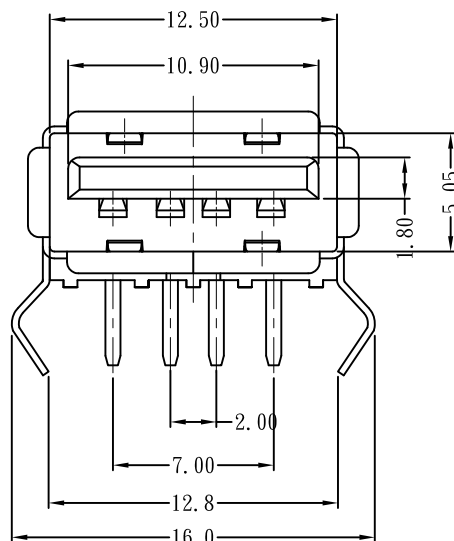
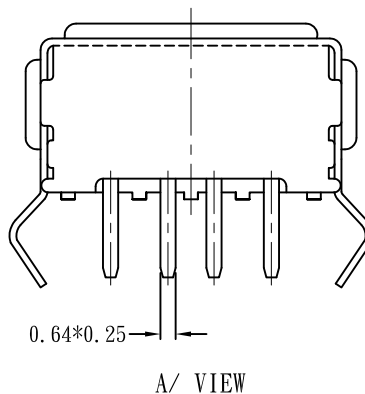


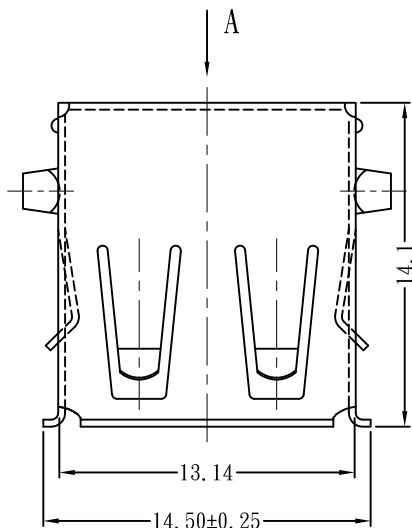

Note:

1.Material:


- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.25mm
- 1.3 Shell: Spcc,t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 m VMax.
- 2.4 Insulation resistance: 1000 M WMin.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -55°C~85°C

S30:min.1.27um Ni all over;min.0.76um Au in the contact area of 4mm;min.0.1um Au on the rest of mating area (2mm);

RoHS Compliant

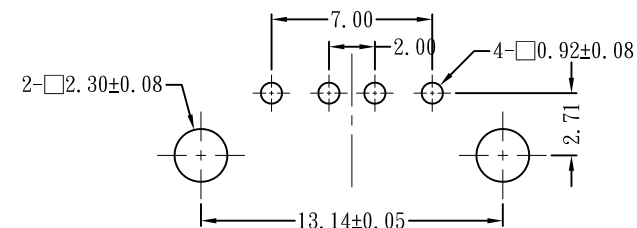

Recommended P.C. Board
Hole Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SRxxSxx-4A-LF
SERIES
FEMALE
DIP 90°
LEADFREE
4 PIN A TYPE
S03:SEMI/GOLD/03u"
S30:SEMI/GOLD/30u"
BK:BLACK
WH:WHITE

DESCRIPTION: USB A TYPE 板端 90° (CUSTOMER DRAWING)