
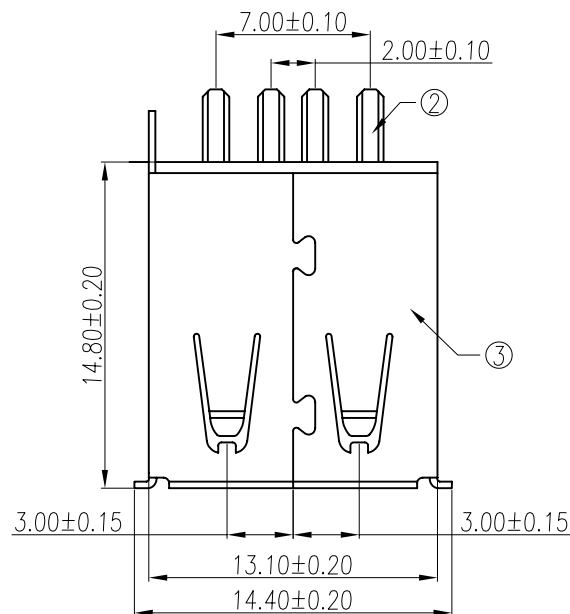


Note:

Specification:

1. Rated voltage and current: 1A Max.
2. Dielectric withstanding voltage: 30V(ac) for 1 minute.
3. Contact resistance: Before life test 30m ohm Max.
After life test 50m ohm max
4. Insulation resistance: 1000M ohm Min at DC 500V.
5. Insertion force: 35 Newtons Max.
6. Extraction force: 10 Newtons Min.
7. Solderability: Terminal shall be immersed in flux before test, Then dip in molten solder for 5 ± 0.5 sec. At $245 \pm 5^\circ\text{C}$
8. Temperature range: $-55^\circ\text{C} \sim +85^\circ\text{C}$
9. Finishes: Contacts: Gold flashed 1u", 3u", 5u", 10u", 15u", 30u"



3	Shell	1	Brass	T=0.30mm	80~120u" Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area: 0.8~1.2u" Gold Plated over 40u" Nickel min. Solder area: 80~120u" Tin Plated over 40u" Nickel min.
1	Housing	1	P.B.T	UL 94-V0	White
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

USB-SSWH-4A-LF

SERIES | WHITE SOLDER FEMALE | LEADFREE 4 PIN A TYPE

DESCRIPTION: