
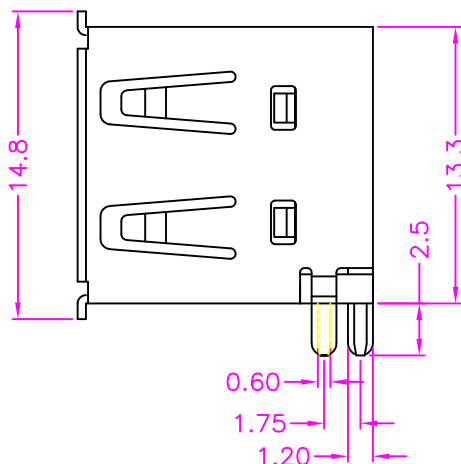
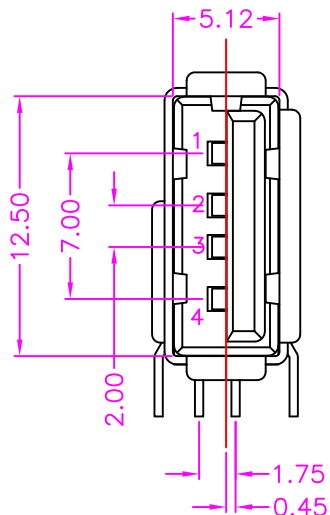
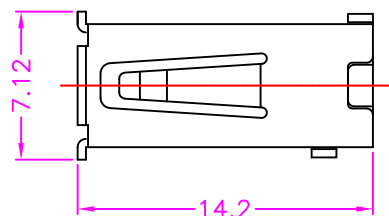



MATERIALS

HOUSING: PBT (UL 94V-0)
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

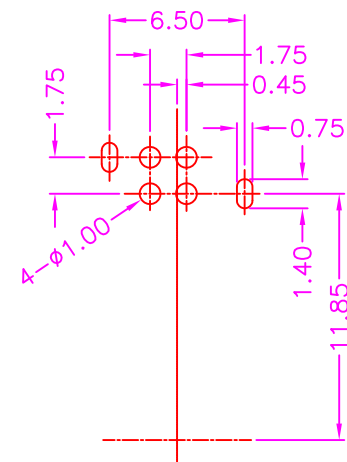

P.C.B. LAYOUT
TOP VIEW ± 0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

USB-SU2M1WH-4A-LF
SERIES | | | | LEADFREE
FEMALE | | | | 4 PIN A TYPE
WHITE
METAL FOOT
2 ROW PIN
UPRIGHT

DESCRIPTION: USB A TYPE, PCB MOUNT, UPRIGHT REVERSE TYPE, METAL SHIELD, FEMALE