

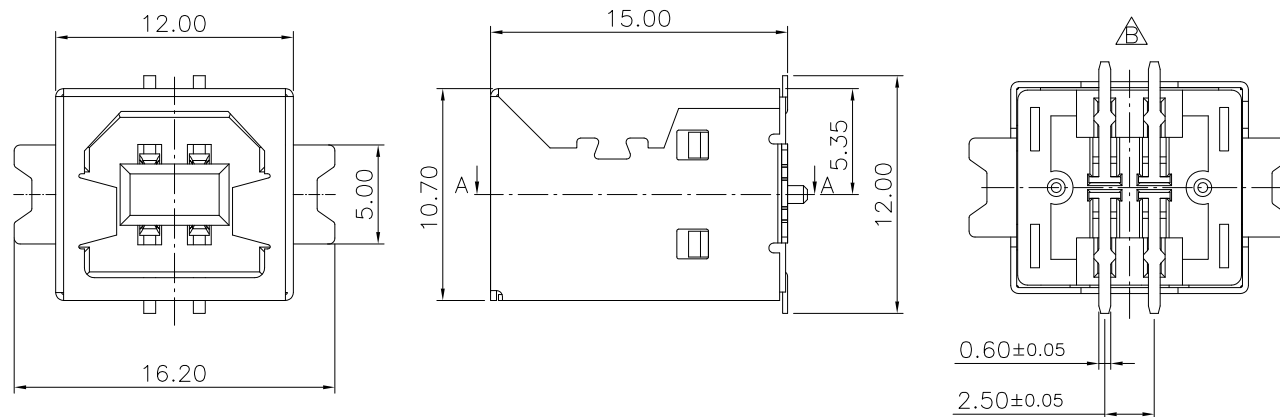


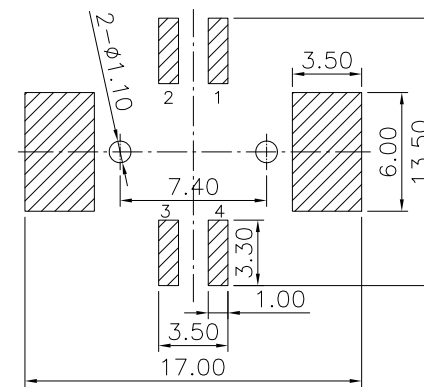

Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:20m ohm.Max.
 Insulation Resistance:1000M ohm.Min.
 Withstanding Voltage:750V AC/Minute
 Operating Temperature Range:-40°C To +105°C

Material and Finish:
 Insulator:Nylon6T(UL94V-0)
 Contact:Phosphor Bronze
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Brass, Nickel plated

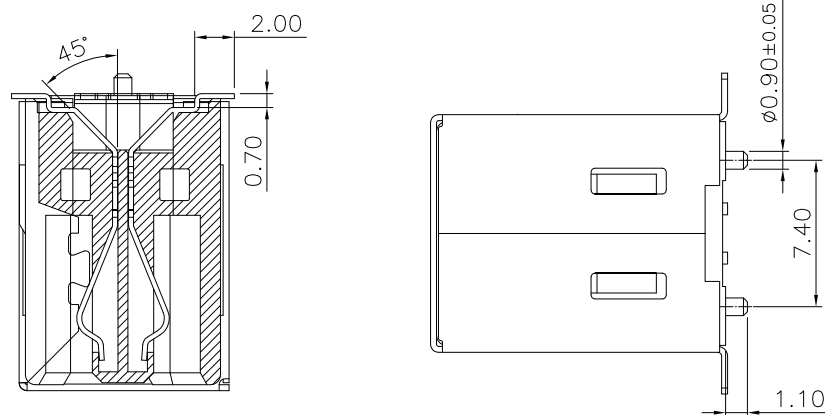

P.C.B Layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±






PPOJECTION

照片框

ORDER INFORMATION

USB-SVWH-4B-LF
 SERIES | LEADFREE
 4 PIN B TYPE
 WHITE
 180°SMT
 FEMALE

DESCRIPTION: USB B Type PCB Female Straight

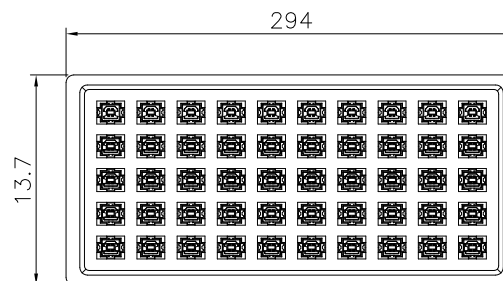

Note:

1.Dimension:


Tray Size: 294(L)X137(W)X17(H) (mm)

Carton Size:320X290X380(mm)


2.Quantity:

30 Tray/Carton

Pin.	Pcs/Tray	Tray/Carton	Pcs/Carton
04	50	30	1500



30 Trays



Carton

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SVWH-4B-LF
SERIES | LEADFREE
4 PIN B TYPE
WHITE
180°SMT
FEMALE

DESCRIPTION: USB B Type PCB Female Straight