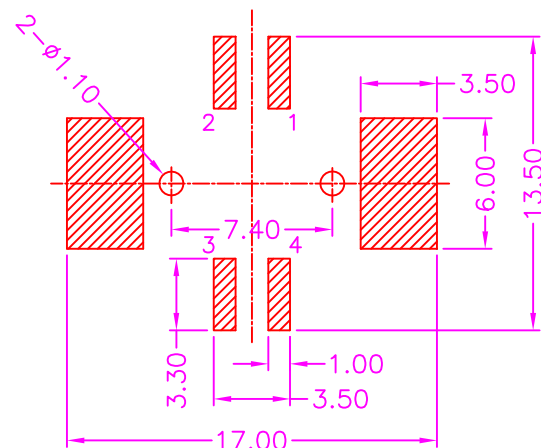
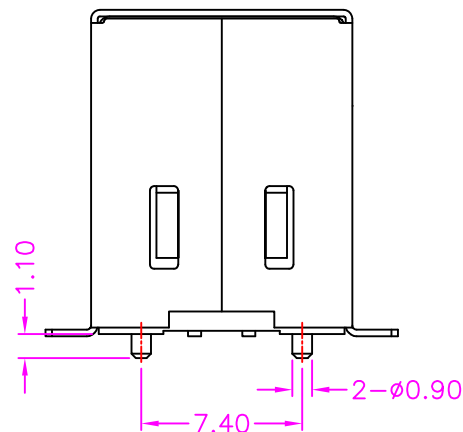
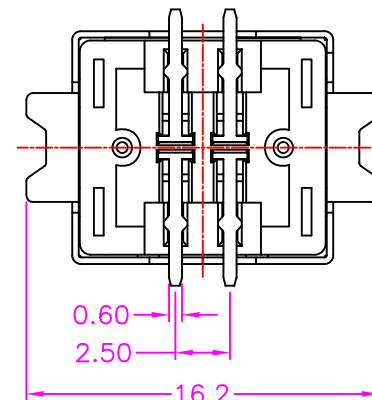
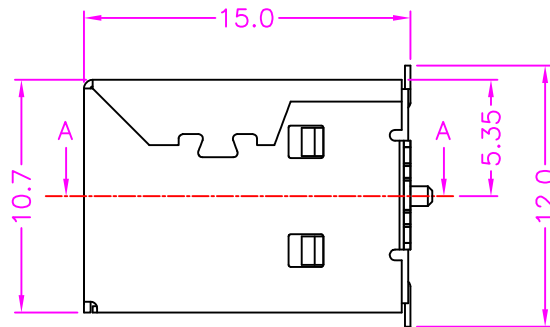
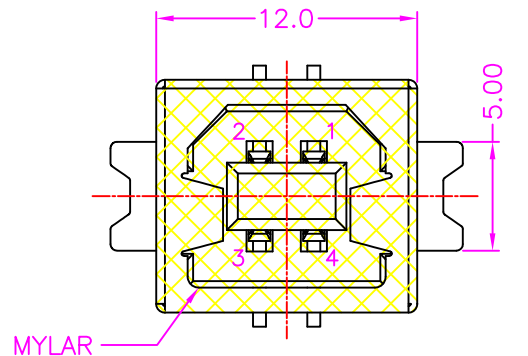


SECTION A-A

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING 30~50u"
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 OVER NICKEL 30~50u",
 TIN PLATING 100u" MIN. ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

USB-SVWHC-4B-LF
 SERIES | | | | LEADFREE
 | | | | 4 PIN B TYPE
 | | | | MYLAR
 | | | | WHITE
 | | | | 180°SMT
 | | | | FEMALE

DESCRIPTION: USB B TYPE, PCB MOUNT, VERTICAL SMT, METAL SHIELD, FEMALE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION