
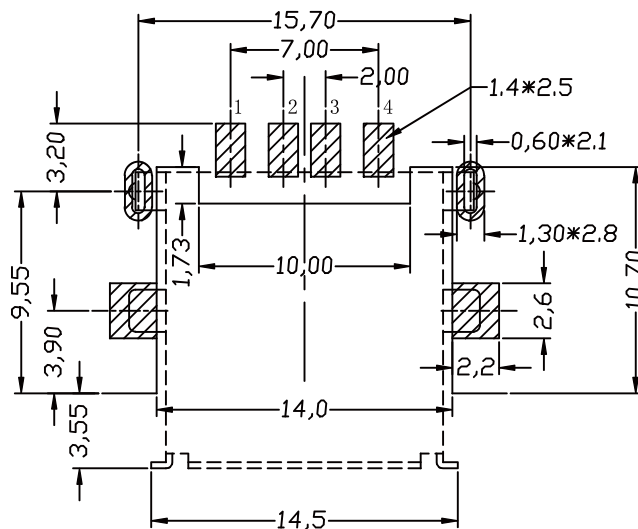
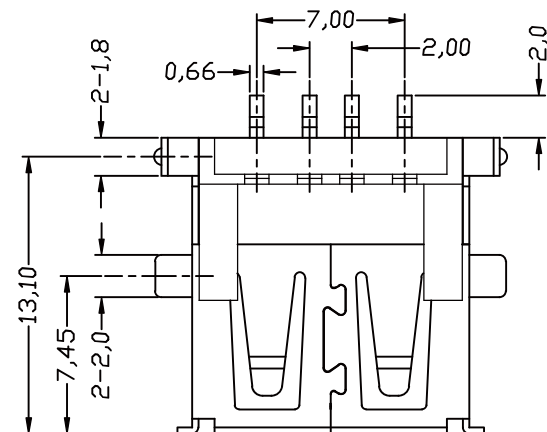
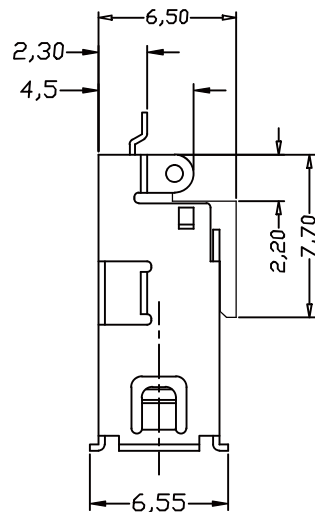
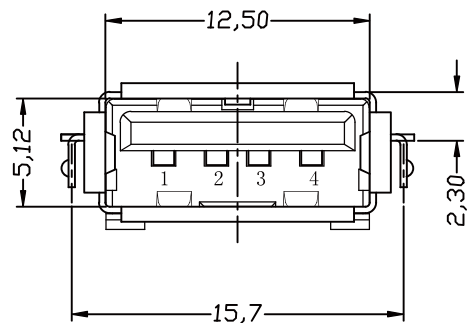


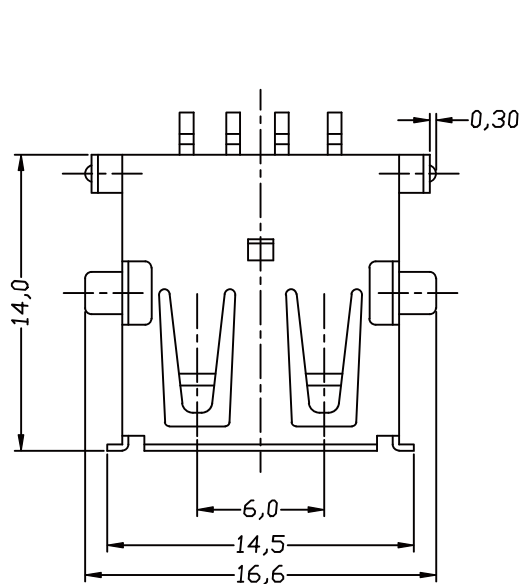

Recommend P. C. B Layout

SPECIFICATIONS:

Contact current Rating:1Amperes.

DIELECTRIC Withstanding Voltage:AC 750V
at sea level

Insulation resistance:1000Megohms Minimum.

Contact Resistance:30mΩ Max

operating Temperature:-55° to+85°

MECHANICAL CHARACTERISTICS:

Mating Force:3.5Kg. Maximum

Unmating Force:1kg. Mlimum.

3	胶蕊	1	PA 6T		COLOR: WHITE/BLACK
2	端子	4	C5191H	NICKET PLATED OVER ALL 80u" TIN/GOLD PLATING	GOLD/1-30u"
1	外壳	1	黄铜	Ni/Sn PLATING	
序号	名称	数量	材料	表面	备注

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SWF23xx-4A-LF

SERIES

LEADFREE

4 PIN A TYPE

BK:BLACK

WH:WHITE

OFFSET 2.3mm

90°SMT

DESCRIPTION: USB 4P AF 90° 破板式