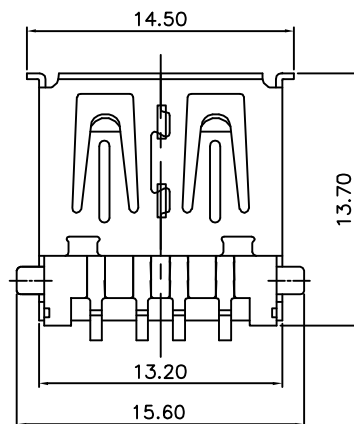
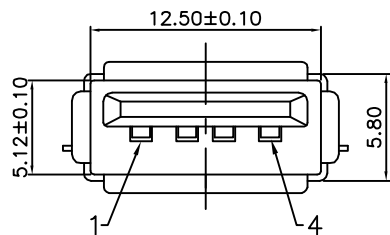


1. Specifications:

Contact Current Rating: 1 Ampere

Dielectric Withstanding Voltage: AC 500V At Sea Level

Insulation Resistance: 1000 Megohms Minimum.

Contact Resistance: 30 Milliohms Maximum.

Operation Temperature: $-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$

Mating Force: 3.57 kgf. Maximum.


Unmating Force: 1.02 kgf. Minimum.

2. Material:

Contact: Copper Alloy

Insulator: Nylon

Shell: Copper Alloy

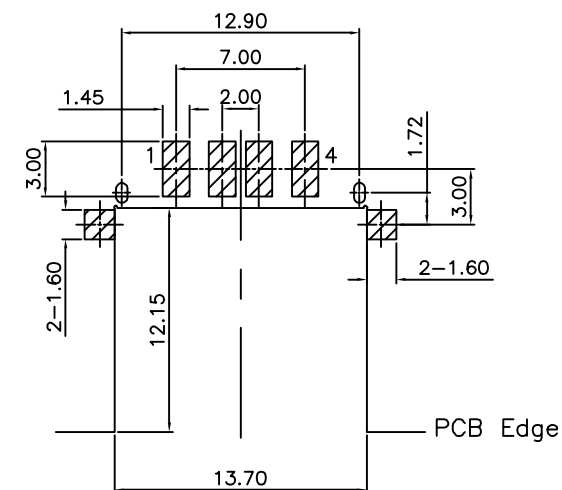

Recommended PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$

PPOJECTION



ORDER INFORMATION

USB-SWFEM17xx-4A-LF
SERIES | T | T | T | T | LEADFREE
FEMALE | 4 PIN A TYPE
90°SMT | BK:BLACK
OFFSET | WH:WHITE
1.72mm
EAR METAL

DESCRIPTION: