


**MATERIALS**

HOUSING: LCP+30%G.F BLACK(UL 94V-0),  
 SHELL: COPPER ALLOY NICKEL PLATED  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATED ON SOLDER TAIL

**SPECIFICATION**

CURRENT RATING: 1.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -25°C~+85°C

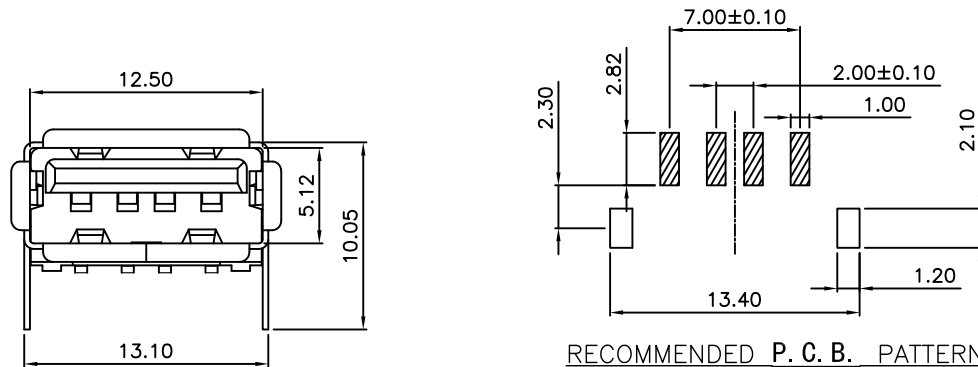

RECOMMENDED P. C. B. PATTERN  
 LAYOUT(T=1.20~1.60mm)



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4

TOLERANCES ARE

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG±

P PROJECTION

照片框

ORDER INFORMATION

USB-SWM1BK-4A-LF  
 SERIES | | | | LEADFREE  
 | | | | 4 PIN A TYPE  
 | | | | BLACK  
 | | | | METAL FOOT  
 | | | | 90°SMT  
 | | | | FEMALE

DESCRIPTION: USB A TYPE, PCB MOUNT, R/A SMT METAL SHIELD, FEMALE