
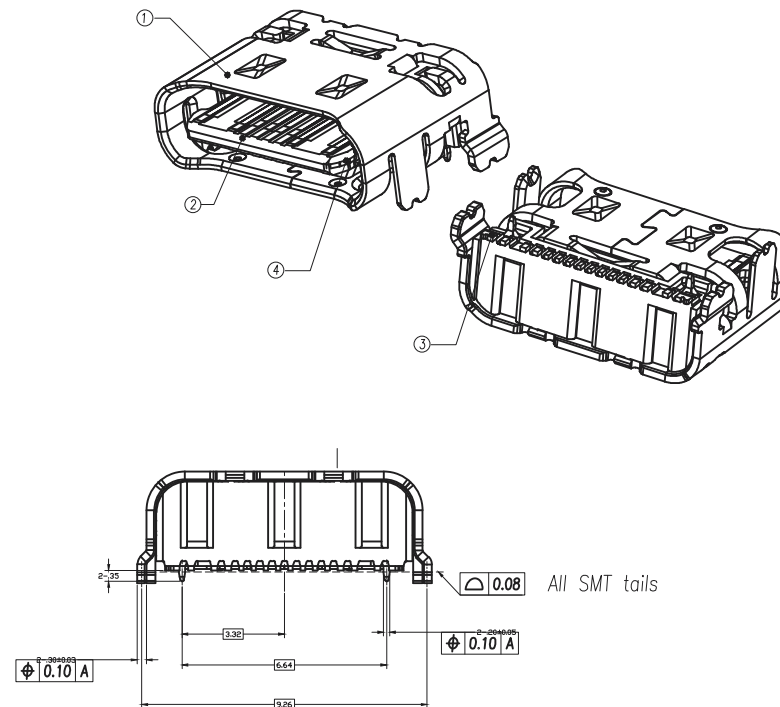




Technical drawing of a rectangular metal frame with rounded ends. The drawing includes the following dimensions and labels:

- Overall width: 8.34 ± 0.02
- Overall height: 2.56 ± 0.04
- Internal width: 6.4
- Internal height: 2.30 ± 0.03
- Labels: A1, A12, B12
- Section line: A-A

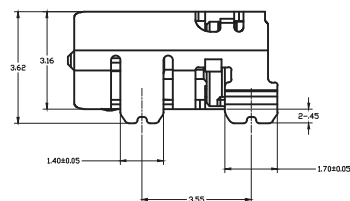

1. ELECTRICAL CHARACTERISTICS:
 - 1.1 CURRENT RATING: 5A
 - 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
 - 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.
2. MECHANICAL CHARACTERISTICS
 - 2.1 INSERTION FORCE: 5~20N
 - 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
 - 2.3 DURABILITY:10,000CYCLES
3. THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.AS SUCH IS CONNOT INDENOENTENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

DESCRIPTION:

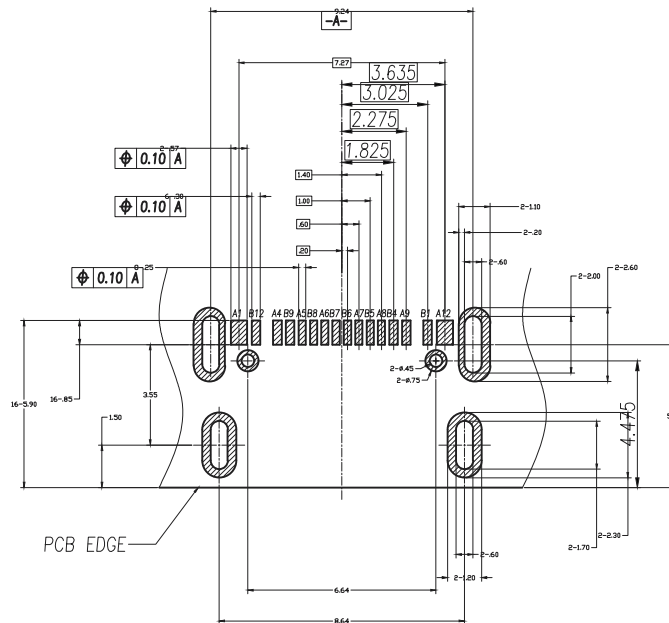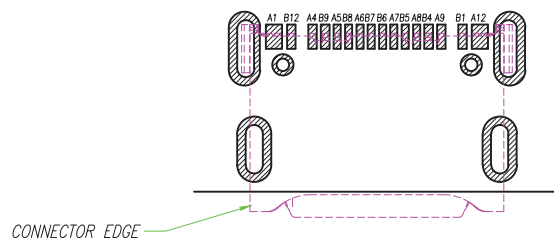

TOLERANCE ± 0.05

PIN ASSIGNMENT

Pin	Signal Name	Pin	Signal Name	Pin	Signal Name	Pin	Signal Name
A1	GND	B12	GND	A7	D-	B6	D+
A2	TX1+	B11	RX1-	A8	SBU1	B5	CC2
A3	TX1-	B10	RX1+	A9	VBUS	B4	VBUS
A4	VBUS	B9	VBUS	A10	RX2-	B3	TX2+
A5	CC1	B8	SBU2	A11	RX2+	B2	TX2+
A6	D+	B7	D-	A12	GND	B1	GND

5	OUT_SHELL	1 PCS	STAINLESS STEEL	Ni Plated
4	OUT_HOUSING	1 SET	PLASTIC	None
3	CONTACT	1 SET	COPPER ALLOY	Au & Ni Plated
2	MOLDING HOUSING	1 PCS	PLASTIC	None
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X ± 0.30
.XX ± 0.25
.XXX ± 0.10
ANG $\pm 5^\circ$



PPOJECTION

照片框

ORDER INFORMATION

USB-SWMM8666MR-24C16-LF
SERIES | | | | LEADFREE
FEMALE | | | | 24P16C / C TYPE
90°SMT | | | | METAL FOOT 8.64+6.64mm

DESCRIPTION:

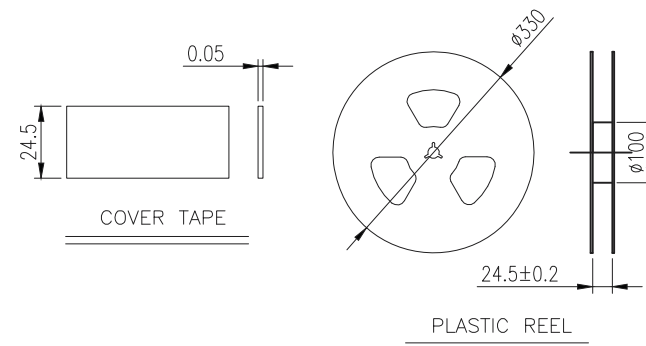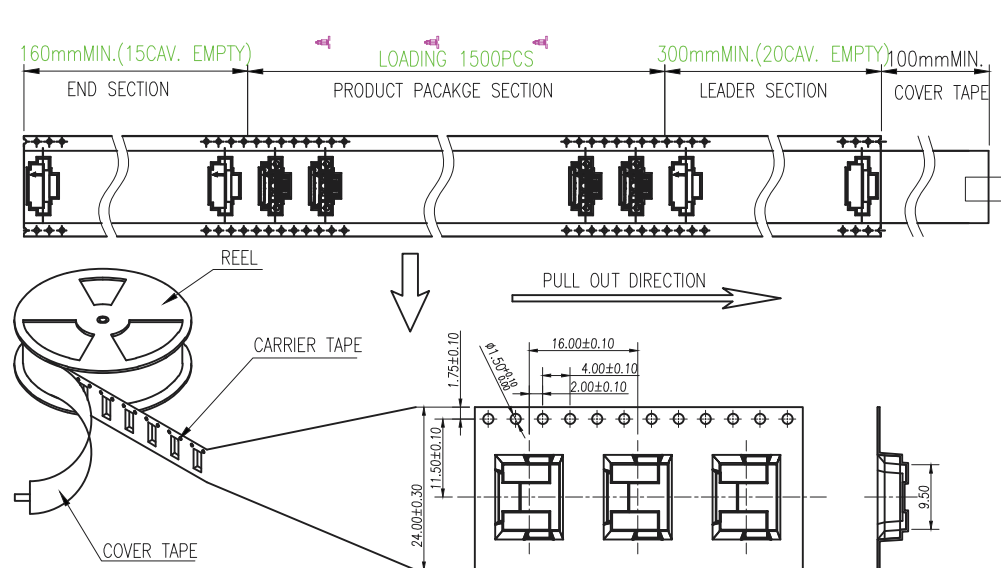

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:



- 2.1 REEL: W=24.5, $\phi A=330$
- 2.2 CARRIER TAPE: T=0.50 W=24.0
- 2.3 COVER TAPE: T=0.05 W=25.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 1500PCS/REEL
- 3.2 SECONARY PACKING: 10 REELS/CARTON(15000PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

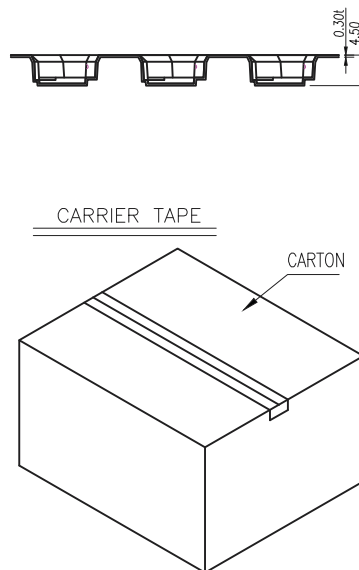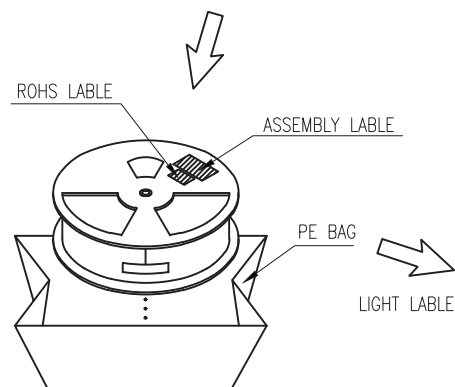

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.25
.XXX $\pm$ 0.10
ANG $\pm$ 5°

PPOJECTION

照片框

ORDER INFORMATION

USB-SWMM8666MR-24C16-LF
SERIES REEL LEADFREE
FEMALE METAL FOOT 24P16C/ C TYPE
90°SMT METAL FOOT 8.64+6.64mm

DESCRIPTION: