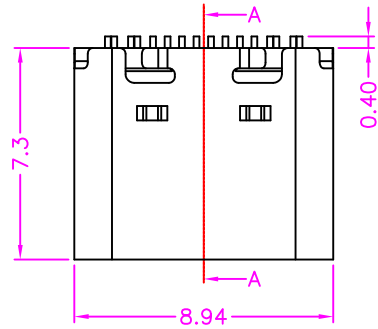








SECTION A-A

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
SHELL: STAINLESS STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING:
1.5A/PIN MAX (A4,A9,B4,B9)
1.25A/PIN MAX (A1,A12,B1,B12)
0.25A FOR ALL THE OTHERS CONTACTS
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 40m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 300V
OPERATION TEMPERATURE: -40°C~+85°C

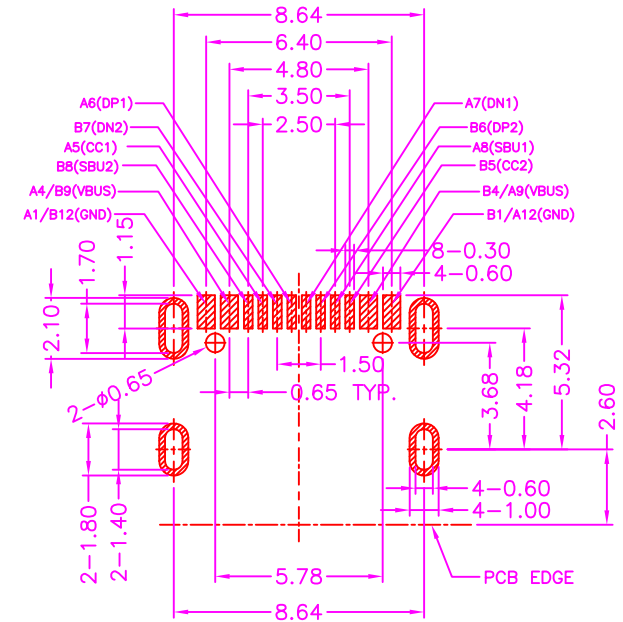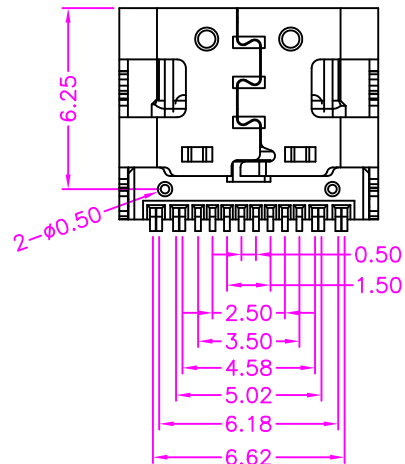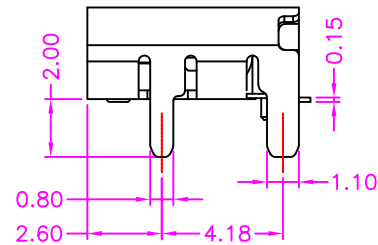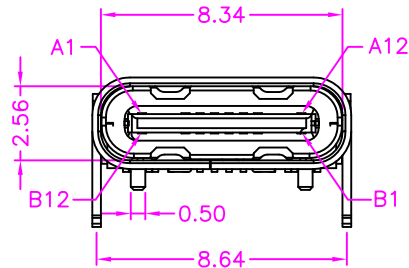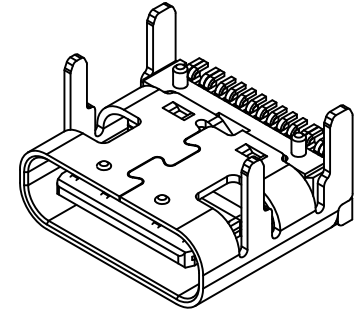

P.C.B. LAYOUT
TOP VIEW ±0.05

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

USB-SWMP8657M-24C16-LF
SERIES | LEADFREE
24P16C
METAL FOOT
METAL FOOT 8.64mm+POST 5.78mm
90°SMT
FEMALE

DESCRIPTION: USB C TYPE, PCB MOUNT, SMT, METAL SHIELD, 16PIN, FEMALE