


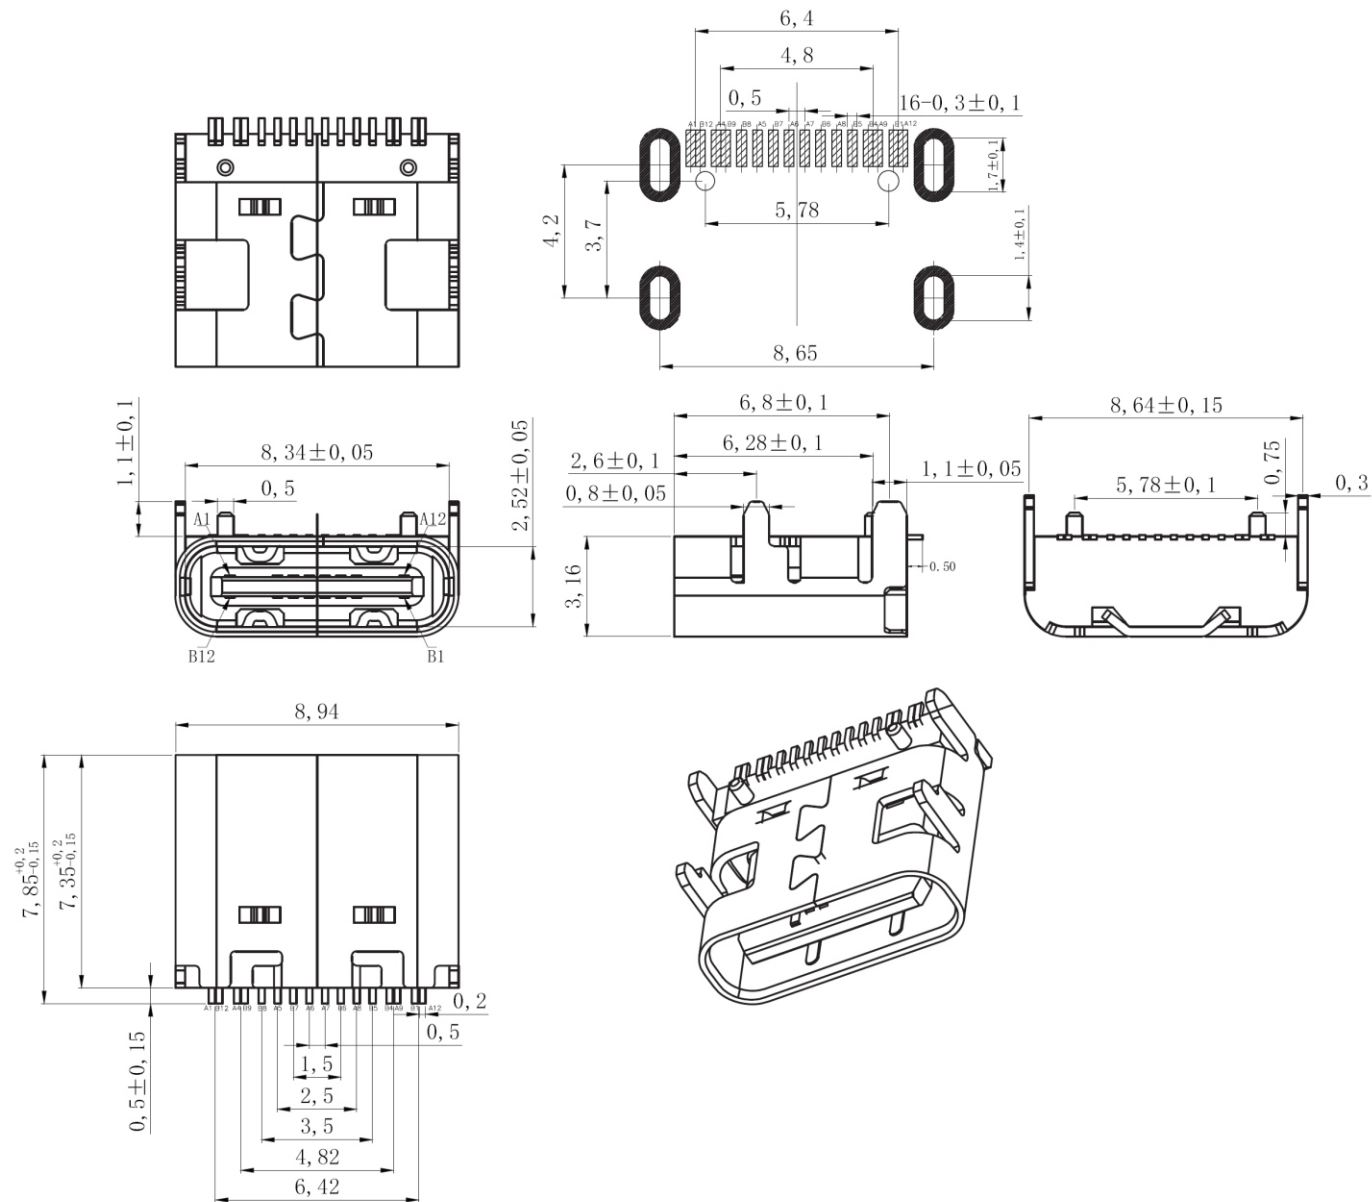

1. 材料

- A. 主体: LCP, 黑色, 白色, UL 94-V0;
- B. 端子: C2680H65, 电镀刷金;
- C. 外壳: 不锈钢, 镀全镍;

2. 主要特性

- A. 电压等级: 20V AC;
- B. 电流: 3A;
- C. 工作温度: -40°C ~ 85°C ;

3. 电气要求:

- A. 接触电阻: 40m Ω Max. (初始), 50m Ω Max. (最后);
- B. 电压: 100V AC 1分钟;
- C. 绝缘电阻: 100M Ω min. DC 500v;

4. 机械性能:

- A. 插入力: 5~20N. (从1~10,000次);
- B. 拔出力: 8~20N. (从1~1,000次);
- C. 耐久性寿命: 10,000次;

A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC5
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

USB-SWMP8657M11-24C16-LF
SERIES LEADFREE
24P16C
METAL FOOT 1.1mm
METAL FOOT 8.64mm+POST 5.78mm
90°SMT
FEMALE

DESCRIPTION: