

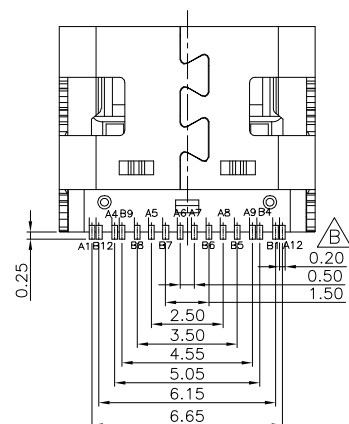

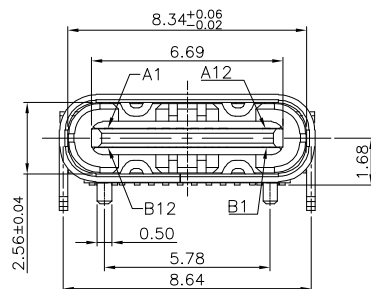
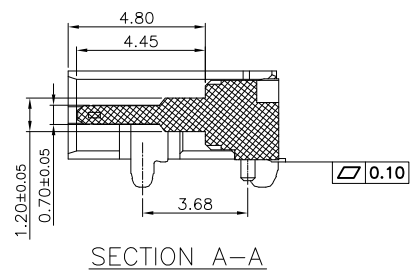
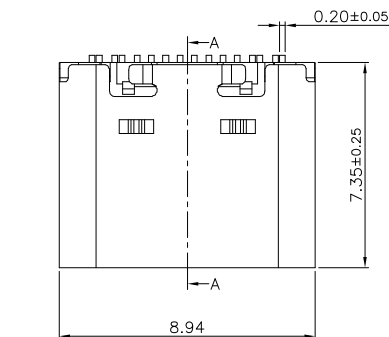


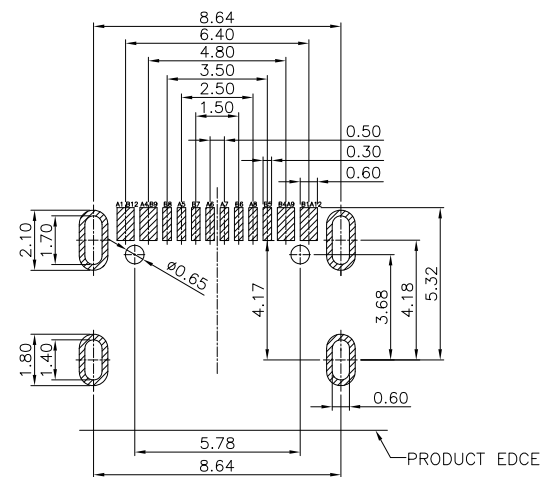

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

Specifications:
 Current Rating:5.0A
 Voltage Rating:5.0V
 Contact Resistance:40m ohm. Max.
 Insulation Resistance:100M ohm. min.
 Withstanding Voltage:100V AC For One Minute
 Operating Temperature Range:-25°C ~ +85°C

Material and Finish:
 Insulator:High Temperature Resistant Plastic(UL94V-0)
 Insulator Color:Black
 Terminal:Copper Alloy, Au Plated / Ni 50u" Min.
 Shell:Stainless Steel, Ni 30u" Min.
 Shielding Plate&Emi Plate:Clear Only



PCB Layout

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

USB-SWMP8657MR-24C16-LF
 SERIES | 24P16C | LEADFREE
 FEMALE | METAL FOOT | METAL FOOT 8.64mm+POST 5.78mm
 90°SMT

DESCRIPTION: USB C Type Female With Peg

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ± 0.30

.X, ± 0.20

.XX, ± 0.10

.XXX, ±

ANG ±

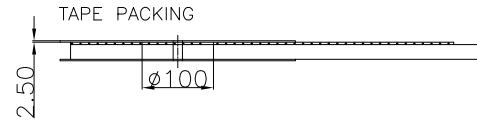


Note:


1.Material:WH Conductive Polystyrene Alloy
100% recyclable.

2.Component load per 13" reel :800pcs.


3.Carton Size:350*350*296(mm)

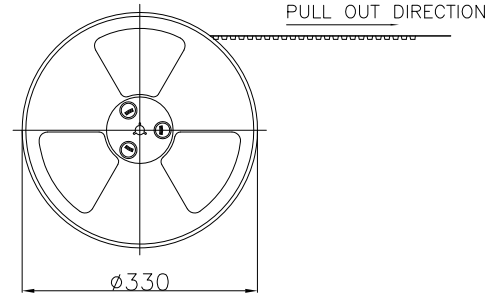

Pin	W	F	Pcs/Reel	Q'ty
16	24	11.5	800	7200

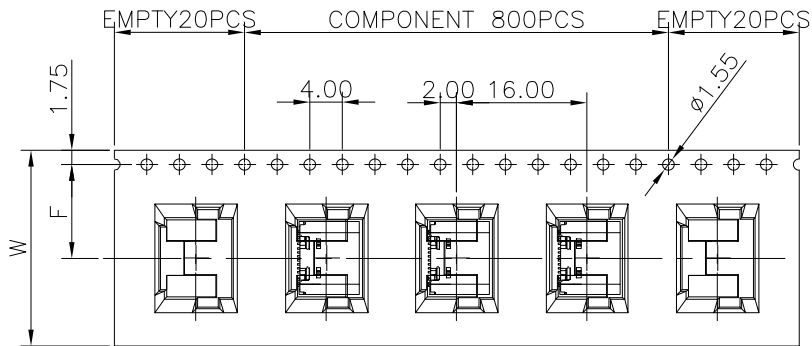

For Reel width (dimension W)24mm Single row hole

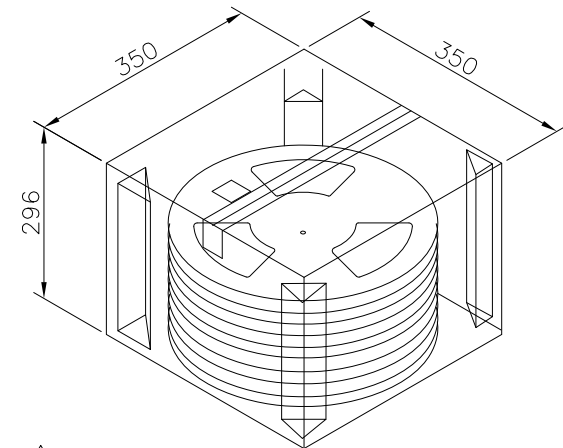

Carton

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.10

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

USB-SWMP8657MR-24C16-LF
SERIES REEL LEADFREE
FEMALE METAL FOOT 24P16C
90°SMT METAL FOOT 8.64mm+POST 5.78mm

DESCRIPTION: USB C Type Female With Peg