
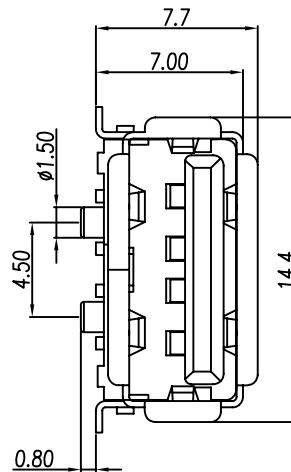


P.C.B. PATTERN LAYOUT

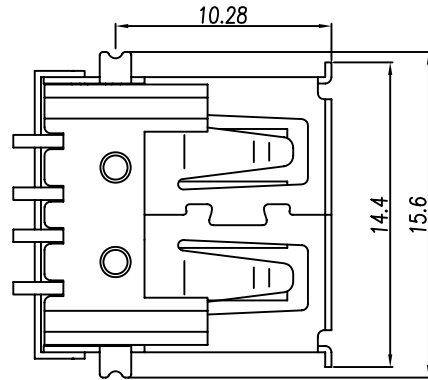

Material:

- (1). Insulator : LCP+30% G.F. UL 94V-0
- (2). Contact : Phosphone Bronze
- (3). Shell : Brass.
- (4). Finish :
 Contact = Gold plated on contact area &
 Tin/Lead plated on terminal area
 Shell = Tin/Lead plated.

USB-SWPBK-4A-LF
 LEADFREE

RoHS Compliant



PART NO. USB-SWPBK-4A

DWG NO. USB-SWPBK-4A

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

USB A TYPE FEMALE SMT

AREA

REVISIONS

HK

DATE

焯倫股份有限公司