

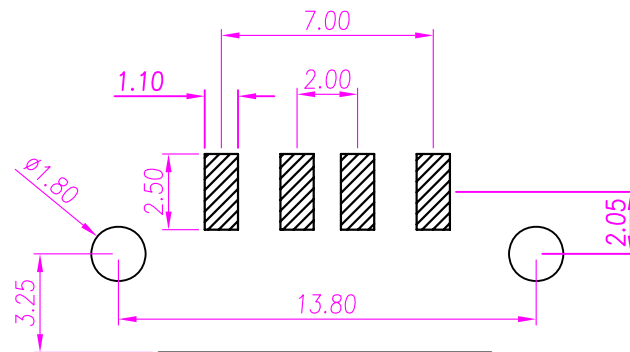
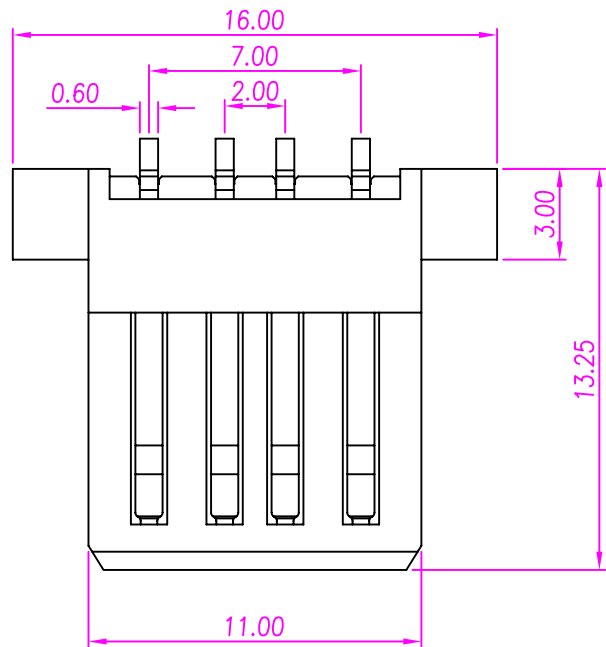


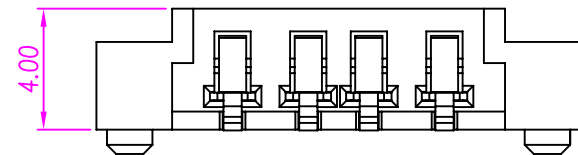

P.C.B LAYOUT

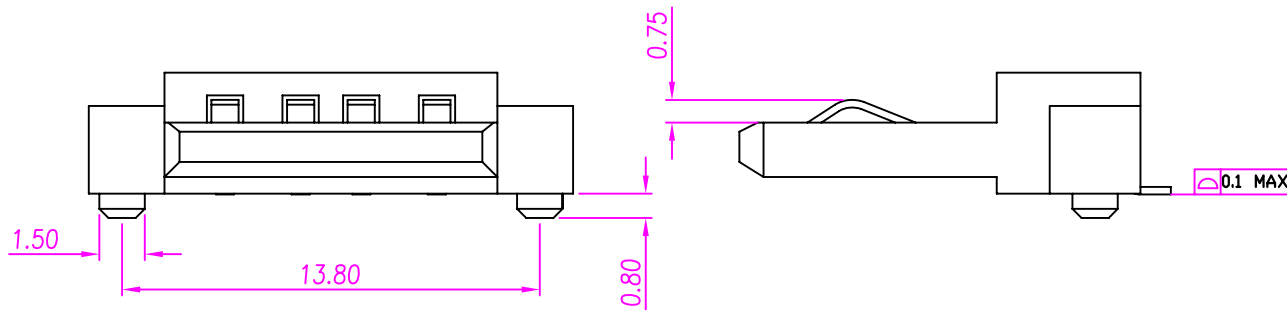

1. MATERIAL :
 1-1. HOUSING : LCP
 1-1. CONTACT : BRASS
1. FINISH :
 1-1. CONTACT : GOLD FLASH ON CONTACT AREA
 BRIGHT TIN 60u" ON SOLDER AREA

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ± 0.05
 ANG ± 1°

照片框

ORDER INFORMATION

USB-SWRVPXMBKR-4A-LF
 SERIES
 FEMALE
 90°SMT
 REVERSED
 REEL
 BLACK
 NON METAL
 POST
 LEADFREE
 4 PIN A TYPE

DESCRIPTION: USB 4PIN (F) A TYPE 板端不帶殼

步驟一:






1. 將成品一一放入包裝盤內, 依同一方向置入.
2. 包裝方式, 如圖所示.
3. 一個包裝盤 600 pcs.

步驟二:

1. 一個紙箱可以裝 10 個包裝盤.
2. 每盤 600 pcs, 每箱 6000 pcs.
3. 將包裝盤放入防水袋中, 包裝完後再封箱.

步驟三:

1. 用膠帶將紙箱封實.
2. 將標籤貼於紙箱上.

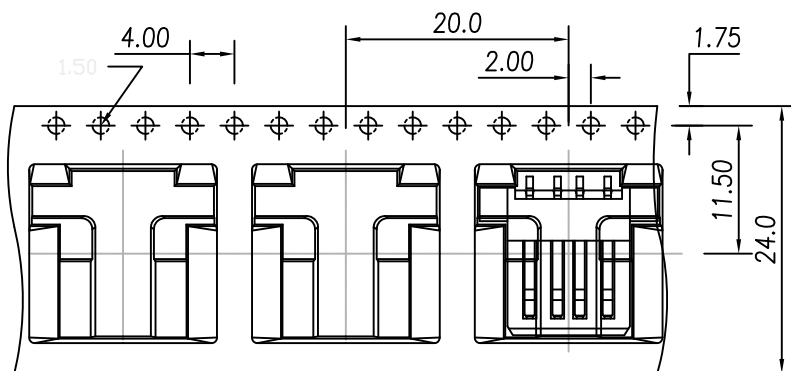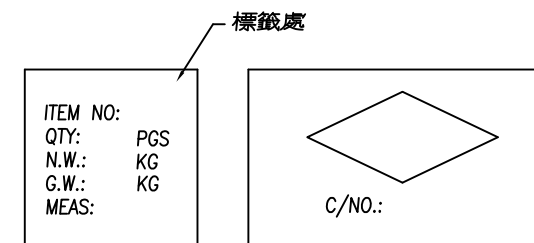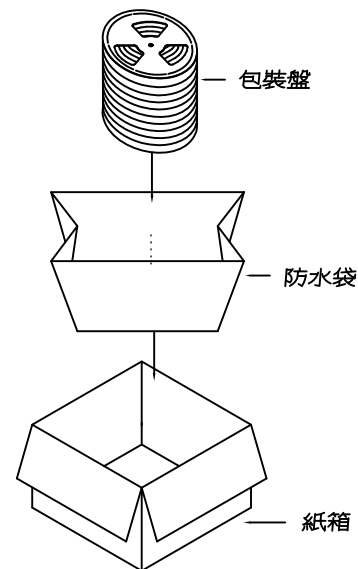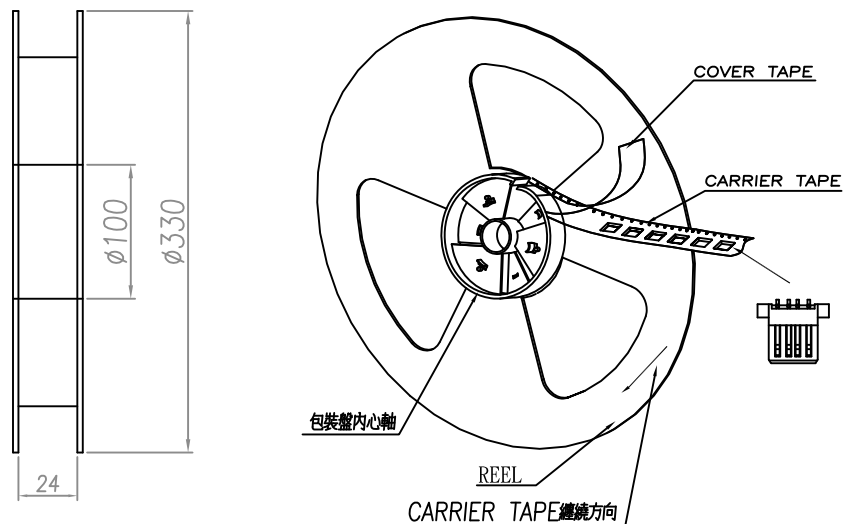

NOTE:

1. 若有未裝滿之零數箱, 必須以緩衝材塞滿.
2. 在搬運過程中要輕拿輕放.
3. 載運輸中不可堆放過多, 不可有重壓現象.
4. 在裝滿產品後, 必須空留帶前和帶後 10 格以上, 然後用紙膠布貼上.
5. 上帶在貼下帶時必須平整, 且黏貼處不要出現氣泡.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

USB-SWRVPXMBKR-4A-LF
SERIES
FEMALE
90°SMT
REVERSED
LEADFREE
4 PIN A TYPE
REEL
BLACK
NON METAL
POST

DESCRIPTION: USB 4PIN (F) A TYPE 板端不帶殼