
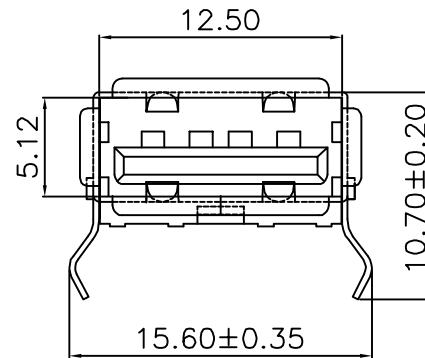


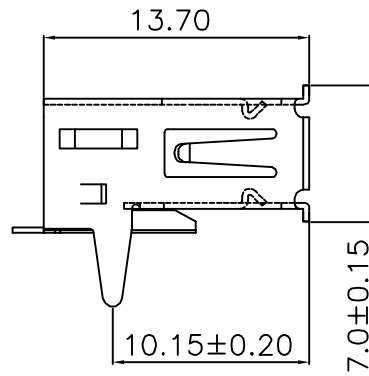

## 1. Materials

Housing: Hi-Temp. Plastic, Black Or White, UL94V-0

Shell: SPCC Or Copper Alloy, Nickel Plated

Terminal: Copper Alloy, Gold Plated On Contact Area.  
Tin Plated On Solder Tails.

## 2. Specification:



Current Rating: 1.5 Amp Max.

Contact Resistance: 30m Ohms Max.

Dielectric Withstanding Voltage: 500 V AC For One Minute

Insulation Resistance: 1000 Ohms Min At DC 500V.

Operation Temperature: -25°C~+85°C

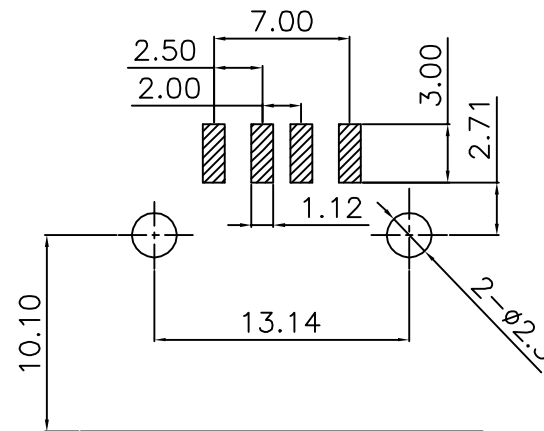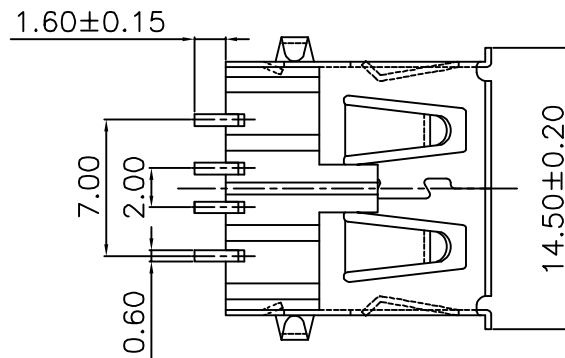

Recommended PCB Layout

Thickness: 1.0±0.05 mm

照片框

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.25  
.XXX ± 0.15  
ANG ± 2°

ORDER INFORMATION

USB-SWRVxx-4A-LF  
SERIES | LEADFREE  
4 PIN A TYPE  
FEMALE | BK:BLACK  
90°SMT | WH:WHITE  
REVERSED

DESCRIPTION: USB A Type, Metal Shield, Dip+SMT, Right Angle, Female, Reverse