


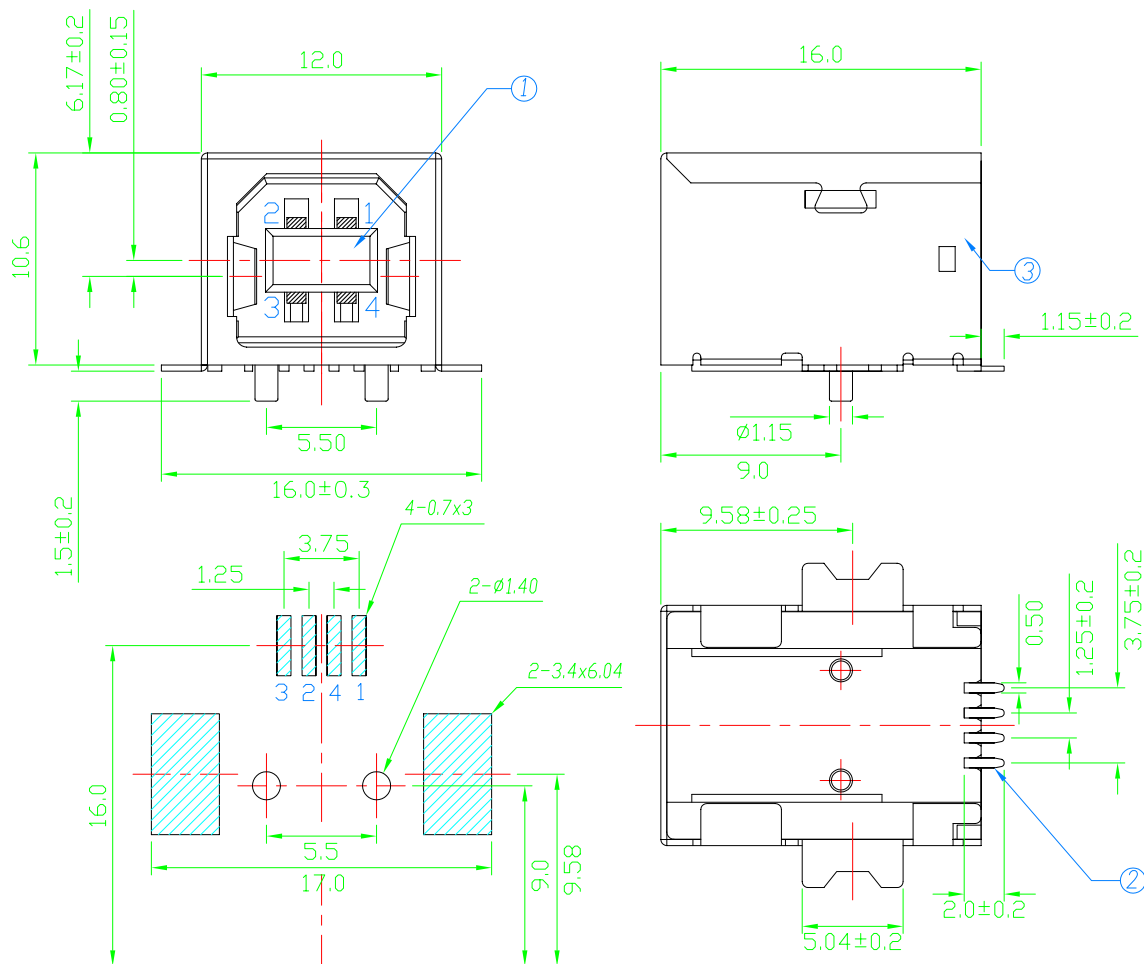

PCB EDGE
PCB LAYOUT
(COMPONENT SIDE)

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:

750V AC (rms) for 1 Minute(Rev.1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

Solderability: Terminal shall be immersed in flux before text. Then dip in molten solder for 5 ± 0.5 sec. At $260 \pm 5^\circ\text{C}$.
Solder Wetting Area: >95%.

Product metal plating shelf life : Tin plating:3 months.

Nickel plating & Gold plating : 6 months.

Turnover and storage environment:

The temperature during turnover and storage is controlled at $20 \sim 30^\circ\text{C}$, and the relative humidity is controlled below 75%.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F.	WHITE	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	NI:50u" MINIMUM.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.38
X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SWWH-4B-LF
SERIES | LEADFREE
4 PIN B TYPE
WHITE
90°SMT
FEMALE

DESCRIPTION: USB B TYPE FLAT 4 PIN SMT