
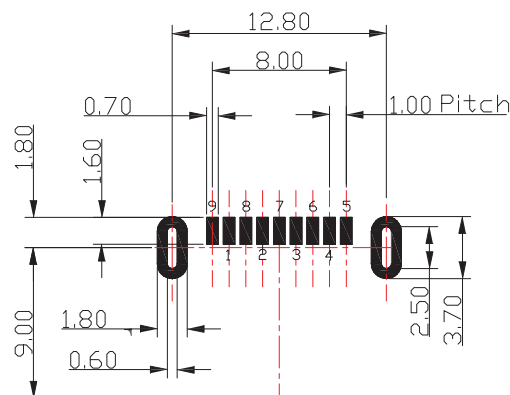
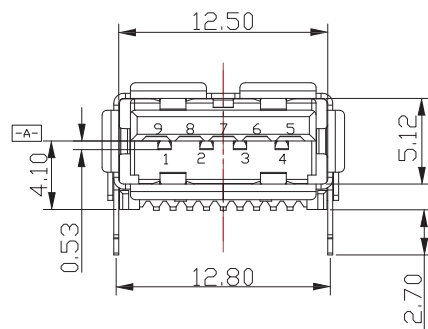
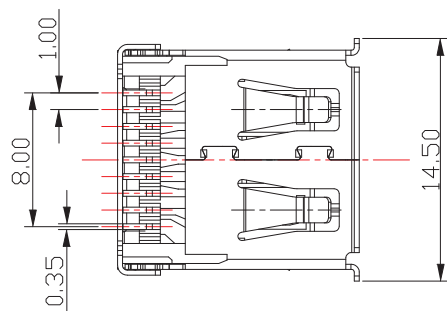


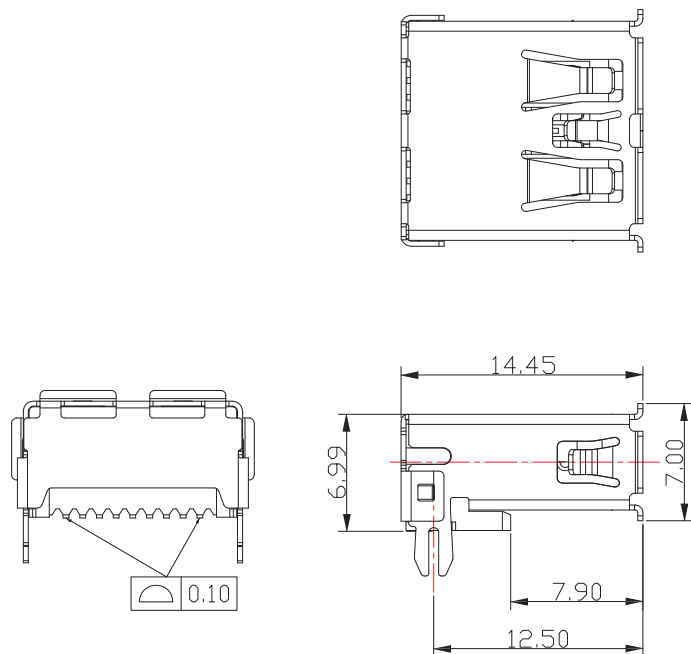

PCB EDGE
RECOMMENDED PCBA LAYOUT

SPECIFICATIONS:

1.MATERIAL:

- 1.1 HOUSING: LCP, UL 94V-0
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHELL: BRASS

2.ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACTRESISTANCE: 30mΩ MAXIMUM
- 2.2 CONTACT CURRENT RATING: 1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
- 2.4 INSULATION RESISTANCE: 1000 MΩ MIN
- 2.5 OPERATING TEMPEROTURE: -40°C ~ 85°C

3 MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE: 3.57kg MAX
- 3.2 UNMATED FORCE: 1.02kg MIN
- 3.3 DURABILITY:MANDATORY: 5,000 CYCLES

4.PLATING:

- 4.1 TERMINAL: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 4.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

USB-SWZ1BLSxx-9A-LF
SERIES | T | LEADFREE
9 PIN A TYPE
FEMALE | S15:SEMI GOLD 15u"
90°SMT | S30:SEMI GOLD 30u"
CLIP | BLUE

DESCRIPTION: USB 3.0 AF SMT本體長=14.45mm, 魚叉腳=2.70mm

www.morethanall.com