

RECOMMENDED PCB LAYOUT

SPECIFICATIONS

Electrical:

- 1.Contact Resistance: 30 mΩ Max
- 2.Insulation Resistance: 1,000 MΩ Min
- 3.Dielectric Withstanding Voltage: 500 V DC
- 4.Temperature Range: -35°C ~85°C


Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass / SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

RoHS Compliant

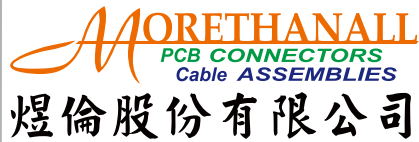

www.morethanall.com

| | |
|-------------------|-------------|
| DRAWING BY CY | |
| CHECKED BY GENIUS | |
| UNIT / mm | SCALE 1 : 1 |
| DATE | |
| SIZE A4 | PPOJECTION |

TOLERANCES ARE

| | |
|---------------|-------|
| Up to 5 | ±0.2 |
| Above 5 ~ 15 | ±0.3 |
| Above 15 ~ 30 | ±0.4 |
| Above 30 ~ 50 | ±0.5 |
| Angle | ±0.3° |

照片框

ORDER INFORMATION

| | | | |
|------------------|------|--|--------------|
| USB-SWZ1xx-4A-LF | | | |
| SERIES | | | LEADFREE |
| | | | 4 PIN A TYPE |
| | | | BK:BLACK |
| | | | WH:WHITE |
| FEMALE | CLIP | | 90°SMT |

DESCRIPTION: USB A/F 貼板無後蓋魚叉腳有捲邊