

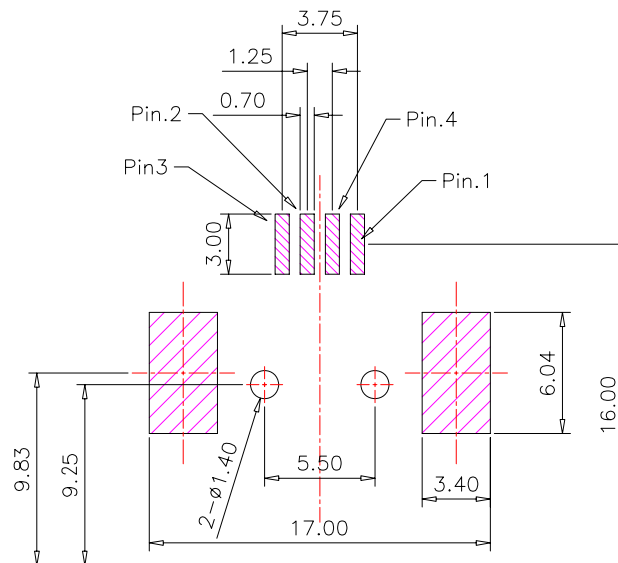
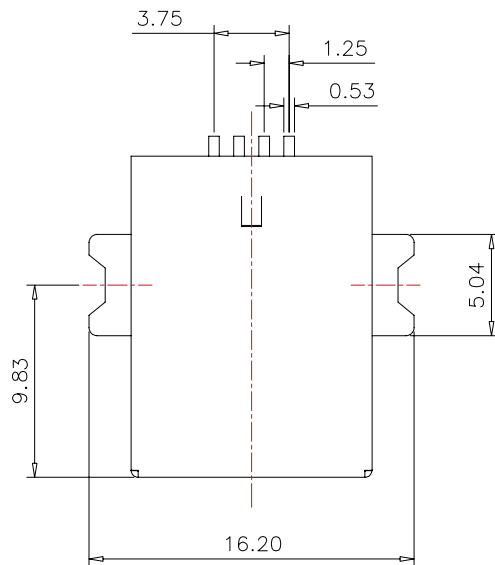


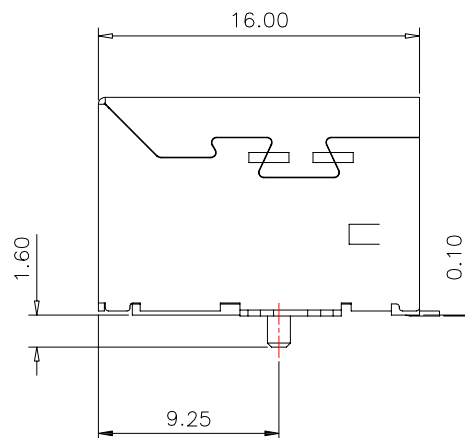

P.C.B LAYOUT MOUNTING PATTERN

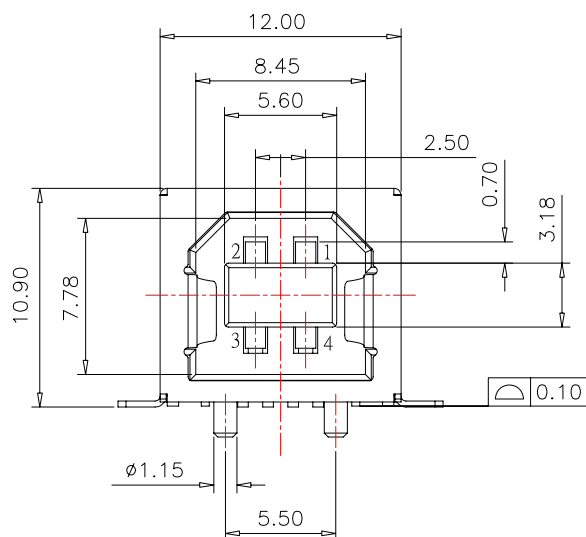

SPECIFICATIONS

1.MATERIAL:

- a.INSULATOR: PA9T; Color: BLACK
- b.CONTACT:PHOSPHOR BRONZE
- c.BRASS/SHEEL: BRASS

2.PLATING :

- a.CONTACT:
Au PLATING ON THE CONTACT AREA:GOLD FLASH
TIN PLATING ON THE SOLDER AREA;
NICKEL UNDERPLATING OVERALL;
- b.BRASS/SHELL:NICKEL PLATING OVERALL;

3.ELECTRICAL:

- a.DIELECTRIC WITHSTANDING VOLTAGE: AC 500V
- b.CONTACT RESISTANCE: 30mΩ Max.
- c.INSULATION RESISTANCE: DC 250V / 1,000MΩ MIN;
- d.CONTACT CURRENT RATING: 1Amp. 30V AC;
- e.OPERATING TEMPERATURE: -55℃~ 85℃

4.MECHANICAL:

- a.INSERTION FORCE: 3.57Kg MAX;
- b.WITHDRAWAL FORCE: 1.02Kg MIN;

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

USB-SWxx-4B-LF
SERIES | LEADFREE
4 PIN B TYPE
BK:BLACK
WH:WHITE
90°SMT
FEMALE

DESCRIPTION: