

1. Material:

- 1.1 Insulator: LCP/PBT UL 94-V0 rated.
- 1.2 Contact: Brass, $t=0.25\text{mm}$.
- 1.3 Shell: Brass或 K7, $t=0.30\text{mm}$.



2.Specification:

- 2.1 Rated voltage and current:1.5A at 250V AC minimum.
- 2.2 Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
- 2.3 Contact resistance:Before life test 30m ohm max,
After life test 50m ohm max.
- 2.4 Insulation resistance:1000M ohm min.
- 2.5 Insertion force:35 Newtons maximum.
- 2.6 Extraction force:10 Newtons minimum.
- 2.7 Solderability:Terminal shall be immersed in flux before test,Then dip in molten solder for 5 ± 0.5 sec. At $245\pm 5^{\circ}\text{C}$.

3.Finishes:

- 3.1 Contacts: Gold flashed 1u",3u",5u",10U",15u",30u".
3.2 Shell: Nickel plated.

3	SHELL	1	K7\ BRASS	T=0.30±0.02mm	Nickel Plated
2	CONTACT	5	BRASS	T=0.25±0.02mm	Gold flashed
1	HOUSING	1	LCP/P.B.T		Black/White
No.	Part Name	Q'ty	Material	Thickness	Finish

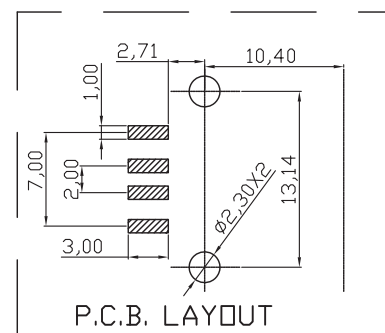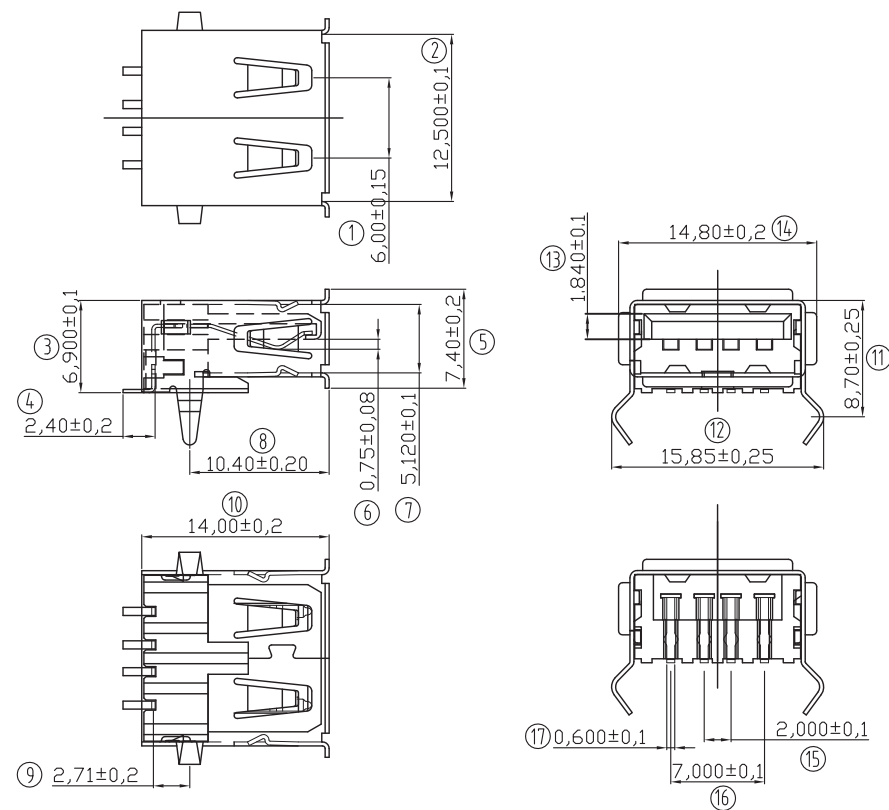

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

SIZE A4

PPOJECTION

TOLERANCES ARE

 $X_{\pm}$ $\chi_{\pm}$ $\cdot XX \pm$ $.XXX \pm$

ANG ±

照片框

ORDER INFORMATION

USB-SWxxR-4A-LF

SERIES

LEADFREE

4 PIN A TYPE

REEL


FK:BLACK

WH:WHITE


90°SMT

FEMALE


DESCRIPTION: USB A FEMALE SMT

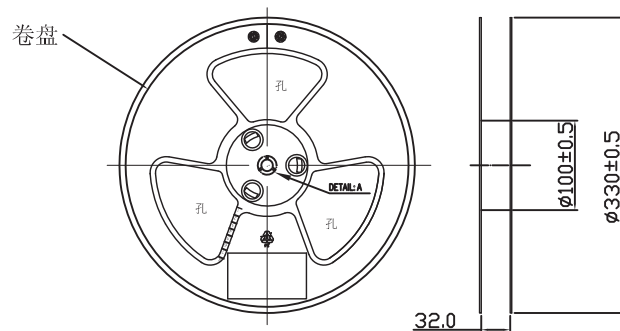


卷帶盤(圖一)

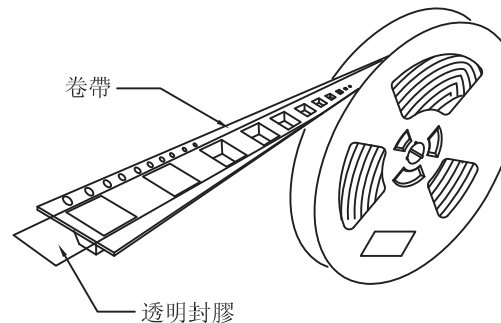


卷裝圖示(圖二)



未封好
內紙箱
包裝說明:(圖三)

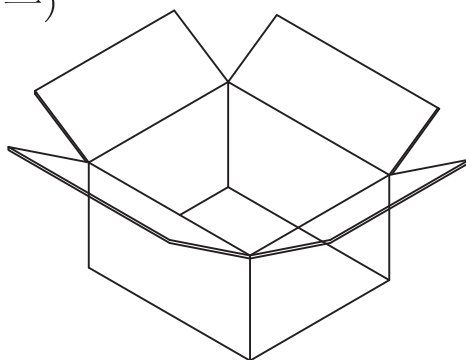

未封好
外紙箱
(圖四)

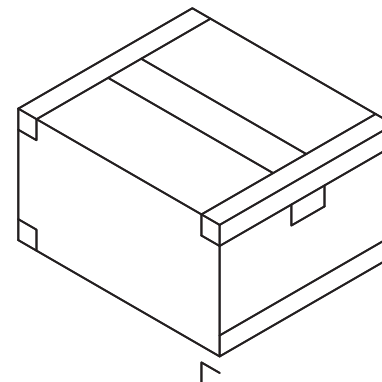

封好外
紙箱
(圖五)

1. 每卷帶盤裝200PCS,不可少數,成品在盤內SMT\ DIP 腳向下,裝好後使用自動卷裝機粘合上透明封膠. 如圖(一, 二)所示
2. 將裝好的卷帶盤放入內紙箱內, 每個內紙箱放2盤, 用透明膠密封, 再將封裝好的內紙箱放入外紙箱中, 每個外紙箱放6個內紙箱, 共有產品2. 4K, 最後用透明膠密封外紙箱. 如圖(三, 四, 五)所示.
3. 紙箱外貼上環保标签, 合格标签, 產品規格說明, 並且貼在外箱側面的箱面規格說明的右上方 (僅貼一側)
4. 包裝材料:(JPL011,RR006, ZX021, ZX004,XZD004).

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SWxxR-4A-LF
SERIES | LEADFREE
4 PIN A TYPE
REEL
BK:BLACK
WH:WHITE
90°SMT
FEMALE

DESCRIPTION: USB A 母 SMT\ DIP 成品类卷帶包裝规范