
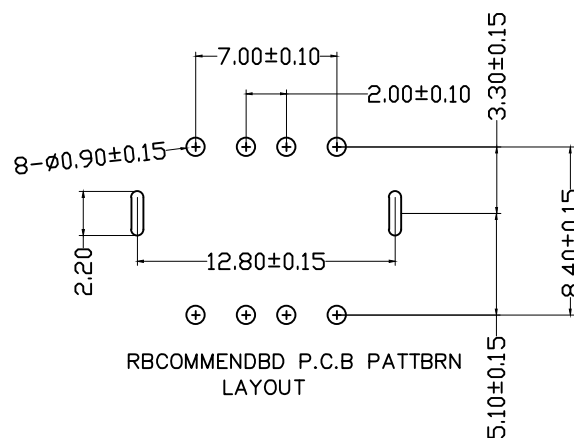


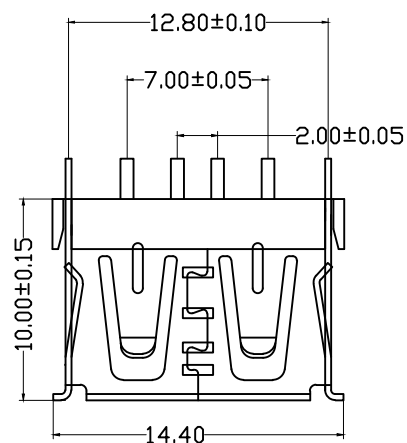

NOTES:

1. HOUSING: SEE NOTES,
- TERMINAL: SEE NOTES.
- SHELL: SEE NOTES.

SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:




- CONTACT RESISTANCE: 30MΩ MAX
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
- INSULATION RESISTANCE: 1000MΩ MIN
- CURRENT RATING: 1.5A

2. MECHANICAL CHARACTERISTIC:

- INSERTION FORCE: 35N(3.57KGF) MAX
- EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
- DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
- 5000 CYCLES MIN
- 5000 CYCLES EXTRACTION FORCE:3~35N

3. ENVIRONMENTAL:

- OPERATING TEMPERATURE: -55℃+85℃

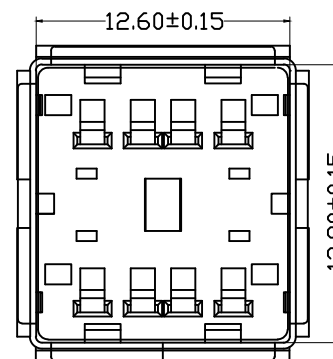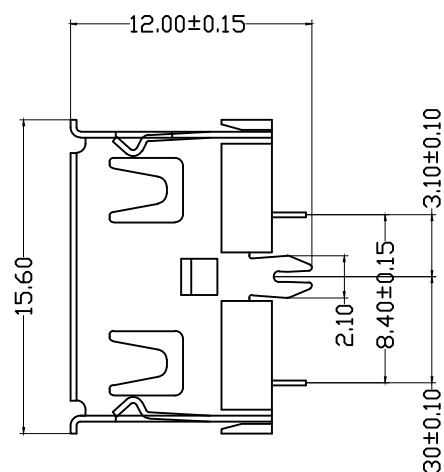

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0 PLC ± 0.30
1 PLC ± 0.25
2 PLC ± 0.20
3 PLC ± 0.10
ANGULAR: ±5°

ORDER INFORMATION

USBB1-FD10xxZ1-4A-LF

SERIES LEADFREE
4 PIN A TYPE

FEMALE
DIP 180°
HIGH 10mm
CLIP
BK:BLACK
WH:WHITE
BL:BLUE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com