
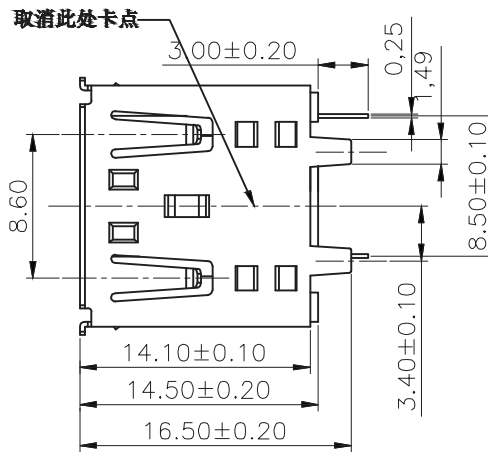


SECTION:A-A

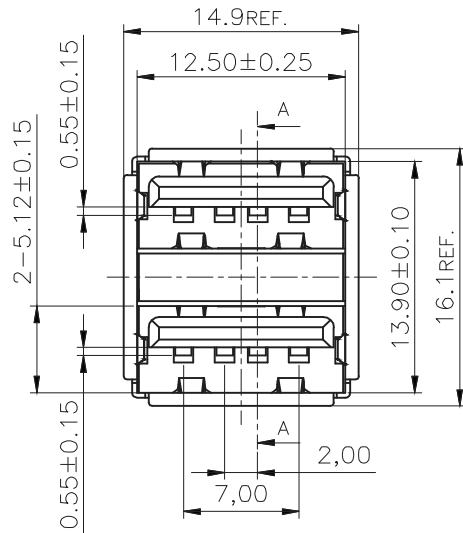

MATERIALS:

Contacts:Bronze,Gold Flash or Gold 30U"/Tin plated.
Insulator:PBT.UL94V-0 Rated.

Shell:cold Roller Steel or brass,Nikel Plated.

Electrical:

Contact current Rating:1 Amperes.

Dielectric Withstanding Voltage:AC 750V at sea level.

Insulation resistance:1000Megohms Min.

Contact Resistance:30Miliohms Max.

Operating Temperature:-55? to +85?

MECHANICAL CHARACTERISTICS:

Mating Force:3.57Kg.Max.

Unmating Force:1.02Kg.Min.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PJECTION

照片框

ORDER INFORMATION

USB1-FDxx-4A-LF

SERIES | LEADFREE
| 4 PIN A TYPE
| BK:BLACK
| WH:WHITE
| DIP 180°
| FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: