

RECOMMEND P.C.B. LAYOUT

NOTES:

1. material规格:

1) 胶芯材料: PBT符合UL94V - 0

2) 外壳: C2680; T=0.30

电镀: 镀镍

3) 后壳: SPCC; T = 0.30

电镀: 镀镍

4) 中夹片: C2680; T=0.30

电镀: 镀镍

5) : T=0.25mm C5191终端

电镀: 半金锡

特点: 2. electrical

1) 绝缘电阻: 1000mΩ min;

2) 接触电阻: 30mΩ 最大;

3) withstanding电压: 500V交流;

特点: 3. mechanical

1) : 3.57kgf插入力最大;

2) : 1.02kgf提取力最小;

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

P PROJECTION




照片框

ORDER INFORMATION

USB1-FROR-4A-LF

SERIES | LEADFREE  
4 PIN A TYPE  
ORANGE  
DIP 90°  
FEMALE





DESCRIPTION:

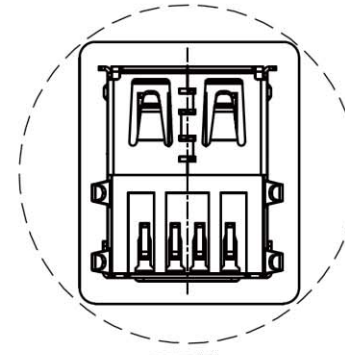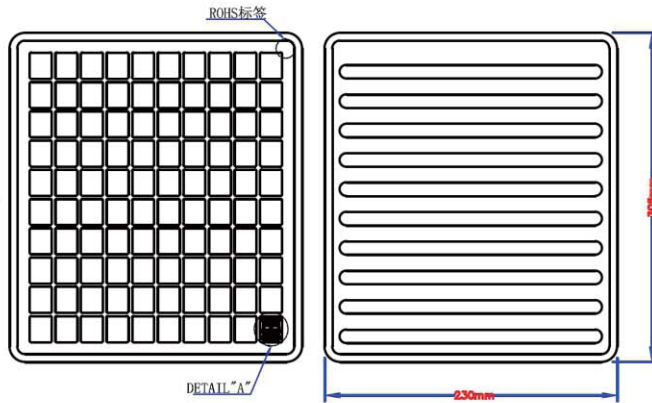

DETAIL "A"  
SCALE 10:1

包装说明:

1. 把检验好之成品如图示方向放入真空盘, Pin针脚向上摆放, 每盒放200PCS产品, 然后盖好上盖, 四周如图示用装订钉订好, 每边订两处, 共六处.
2. 把订好的真空盘如图示12盘为一捆, 共计1200PCS产品, 然后用PE膜缠好包装.
3. 把缠好的2捆并排放入纸箱中, 然后把单盘放在两捆的中间, 共计产品2500pcs.
4. 注意纸箱内不可有混装, 多装及短装现象.
6. 纸箱规格, 真空盒: 305\*230MM  
纸箱: 490\*330\*265MM

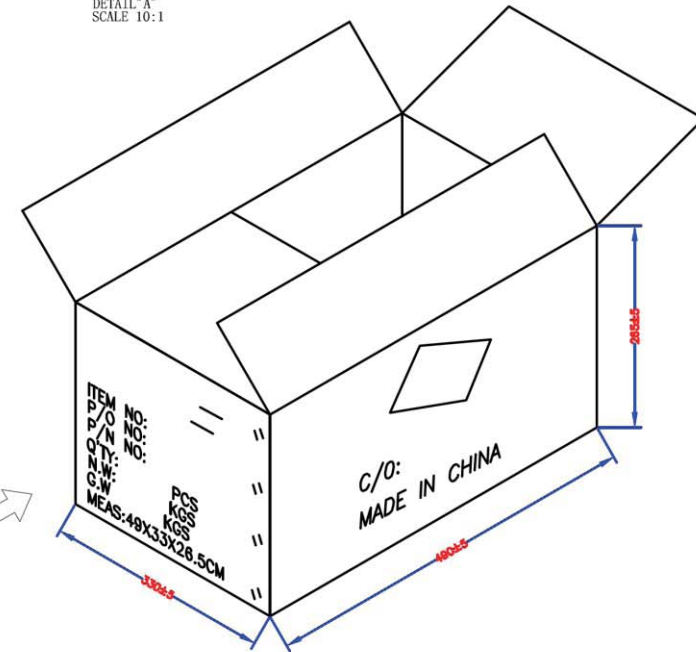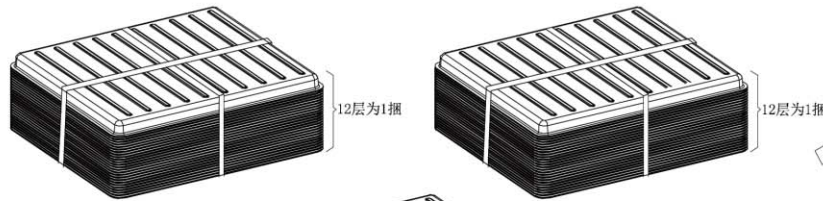

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION

照片框

ORDER INFORMATION

USB1-FROR-4A-LF

SERIES | LEADFREE  
| 4 PIN A TYPE  
| ORANGE  
| DIP 90°  
| FEMALE

DESCRIPTION: