

**Specification:**

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage: 500V AC (rms) for 1 Minute(Rev. 2.0).

Durability (Life Test): 1500 Cycles.

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	PIN TERM.	PHOS. BRONZE,T:0.25	GOLD-TIN PLATED	8	Gold:30u", Ni:40~60u", TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS,T:0.3	TIN PLATED	1	TIN:120~200u"
4	SPRING CLIP	BRASS,T:0.3	TIN PLATED	1	TIN:120~200u"
5	REAR SHELL	SPCC,T:0.3	NICKEL PLATED	1	NI:80~120u"

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ± 0.38

.X, ± 0.25

.XX, ± 0.13

.XXX, ± 0.05


ANG ±

P PROJECTION

照片框

**ORDER INFORMATION**

USBB1-FRSBKS30-4A-LF

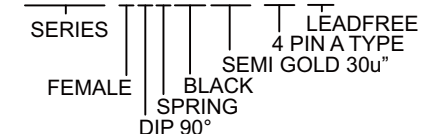

DESCRIPTION: DUAL USB A TYPE 8 PIN