


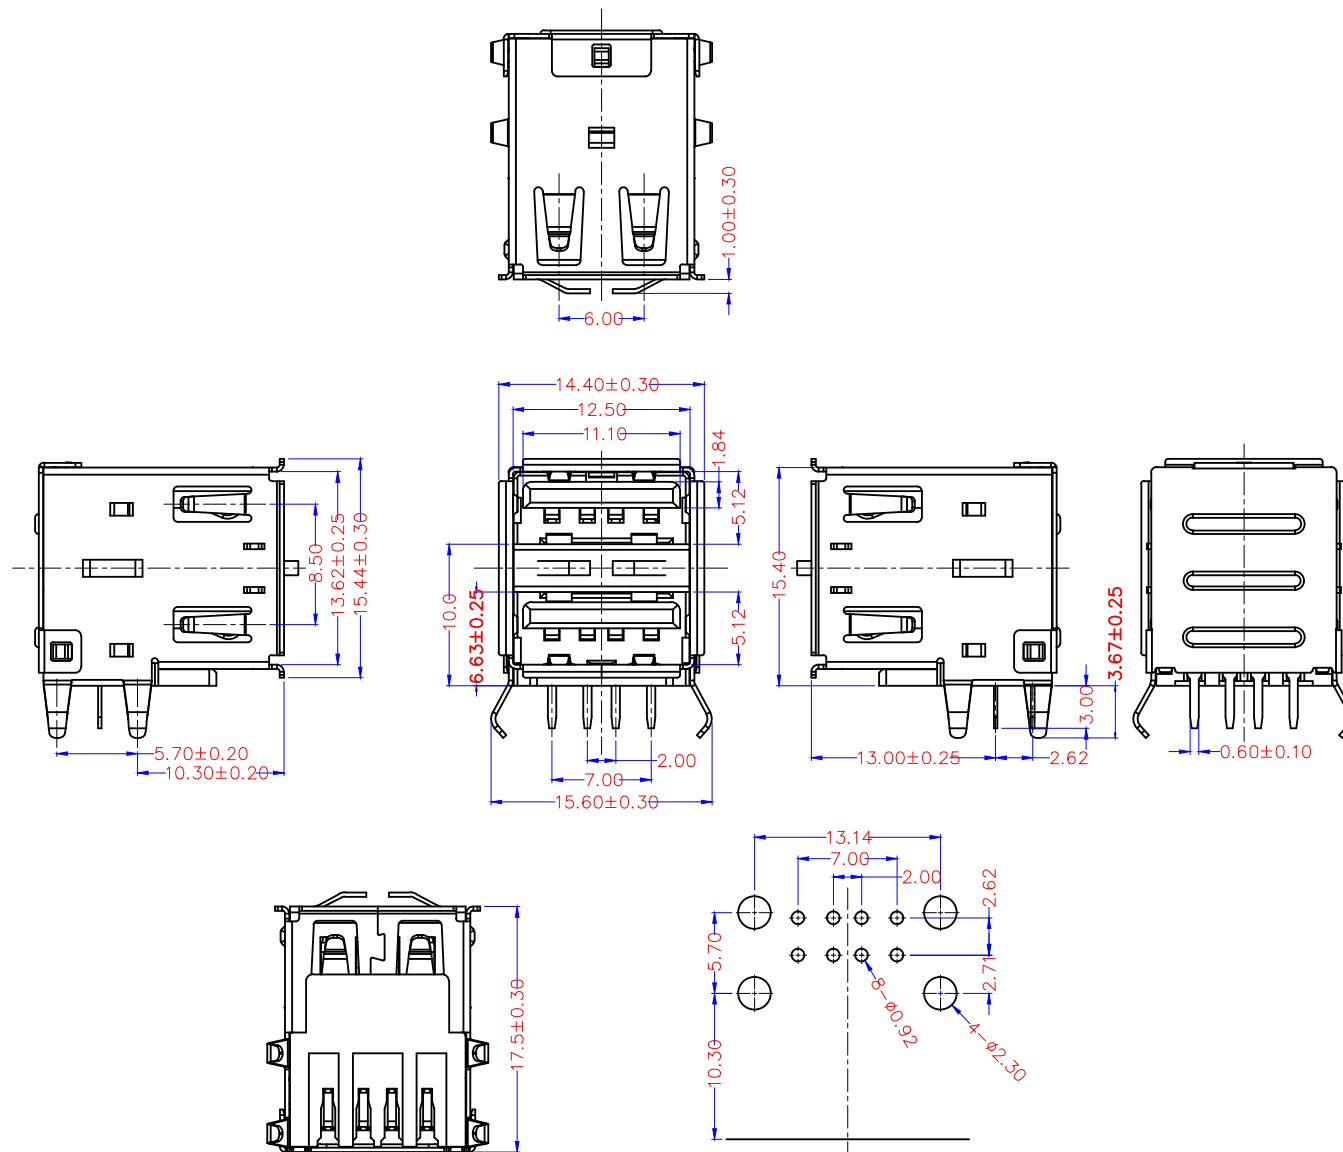

NOTES:

1.material规格:

1) 胶芯材料: PBT符合UL94V - 0

2) 外壳: C2680; T=0.30

电镀: 镀镍

3) 后壳: SPCC; T = 0.30

电镀: 镀镍

4) 中夹片: C2680; T=0.30

电镀: 镀镍

5) : T=0.25mm C5191端子

电镀: 半金锡

特点: 2.electrical

1) 绝缘电阻: 1000mΩ min;

2) 接触电阻: 30mΩ 最大;

3) withstanding电压: 500V交流;

特点: 3.mechanical

1) : 3.57kgf插入力最大;

2) : 1.02kgf提取力最小;

RECOMMEND P. C. B. LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

PPOJECTION

ORDER INFORMATION

USB1-FRSxx-4A-LF

SERIES LEADFREE
4 PIN A TYPE
BK:BLACK
WH:WHITE
FEMALE SPRING
DIP 90°

DESCRIPTION: USB AF 90度 雙層半包長膠雙彈

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com