
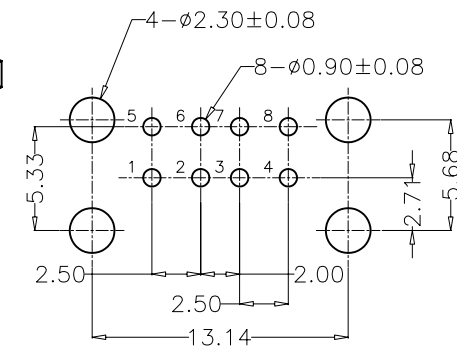



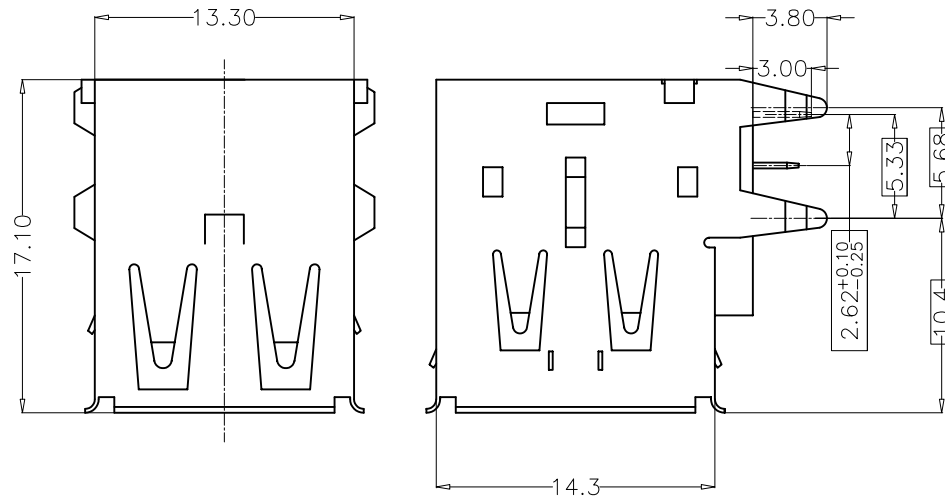

P.C.B LAYOUT
TOP VIEW

NOTES:

1.MATERIAL

- 1.1 CONTACTS: PHOSPHOR BRONZE, GOLD/TIN PLATED
- 1.2 SHELL: BRASS, NICKEL PLATED
- 1.3 INSULATOR: PBT UL 94V-0

2.ELECTRICAL

- 2.1 TERMINATION RESISTANCE: 30m OHMS MAX
- 2.2 INSULATION RESISTANCE: 2000M OHMS MIN AT 250V DC
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: AC 750V/min.R.M.S.


3.MECHANICAL

- 3.1 MATING FORCE: 35 NEWTONS MAX
- 3.2 UNMATING FORCE: 10 NEWTONS MIN

4.ENVIROMENTAL

- 4.1 TEMPERATURE RANGE: -50°C ~ +105°C
- 4.2 RECOMMENDED PC BORAD THICKNESS: 1.57MM

5.重點尺寸標示: [X]

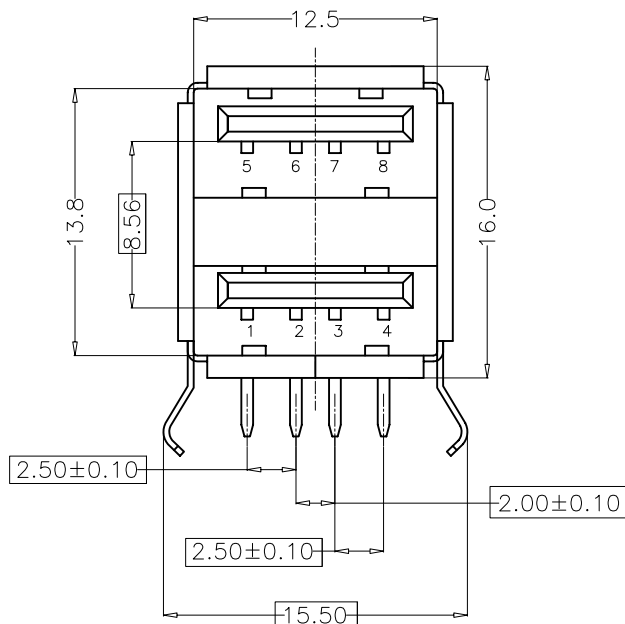

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 2°

PPOJECTION



ORDER INFORMATION

USBB1-FRWH-4A-LF

SERIES

WHITE

DIP 90°

FEMALE

LEADFREE
4 PIN A TYPE

DESCRIPTION: USB A TYPE 母雙層半金白 銅殼鍍銀 不加彈 內扣式