
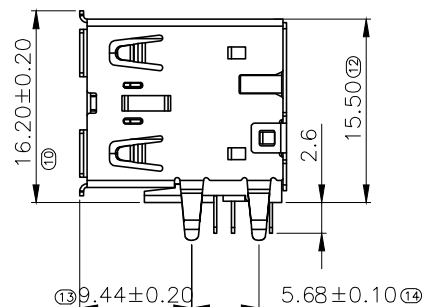
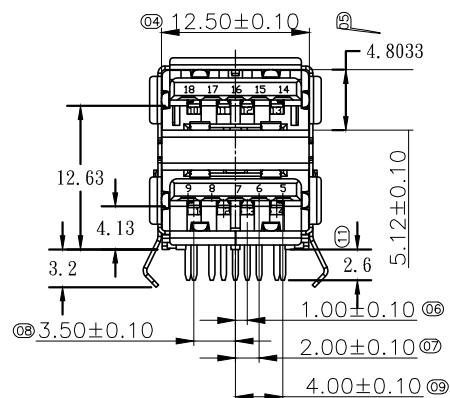
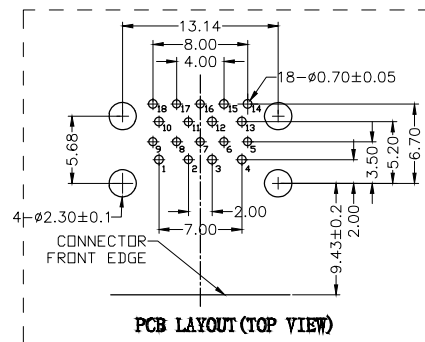



- SPECIFICATIONS:
- Electrical Performance:
 - Contact current Rating:
 - 1.80 Amperes for VBUS and GND contacts
 - 0.25 Amperes for all other contacts
 - Dielectric Withstanding Voltage: AC 100V(RMS).
 - Insulation resistance: 100M ohms Min
 - Contact Resistance:
 - 30m ohm Max for VBUS and GND contacts
 - 50m ohm Max for all other contacts
 - Voltage Rating : 30 Vac (rms)
 - Mechanical Performance:
 - Mating Force: 35N Max
 - Unmating Force: 10N Min; 8N Min After Durability.
 - Environmental Performance:
 - Temperature Range:
 - Operating Temperature: -55°C to +85°C
 - Storage Temperature: -20°C to +60°C
 - Salt Spray 24h Min
 - MATERIAL:
 - Housing: PA9T UL94 V-0
 - Contact: A Contacts C5191
B Contacts C2680
 - Shell: 銅壳
 - PLATING:
 - Contact: Au Plated on contact area
Tin 100u" Plated on solder area
Nickel 50u" Plated underplating over all.
 - Shell: Nickel 50u" Plated.



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

USB1-FRX09xx-9A-LF

SERIES
FEMALE
DIP 90°
NON SPRING

LEADFREE
9 PIN A TYPE
BK: BLACK
WH: WHITE
BL: BLUE
9.44mm

DESCRIPTION: USB3.0 AF雙層90度彎腳捲邊 銅殼 黑膠芯