
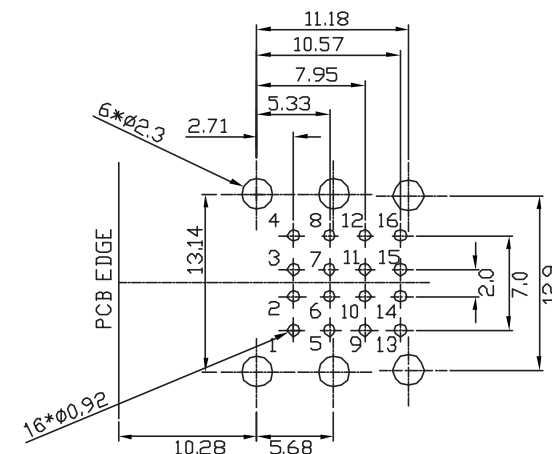

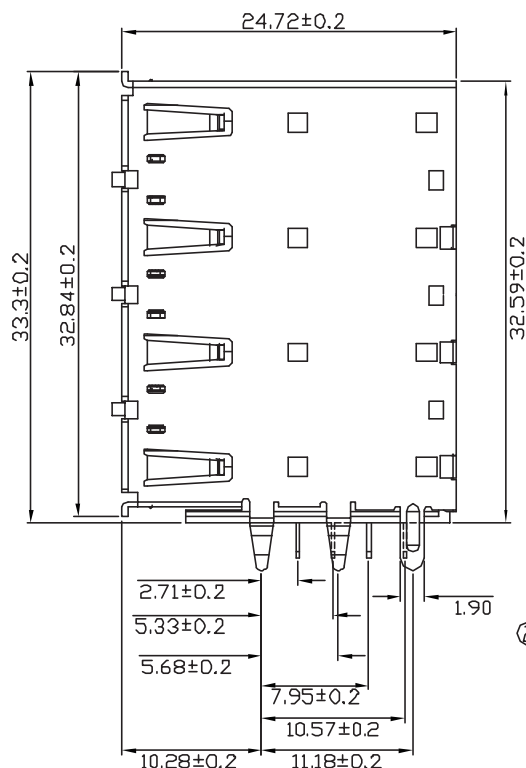


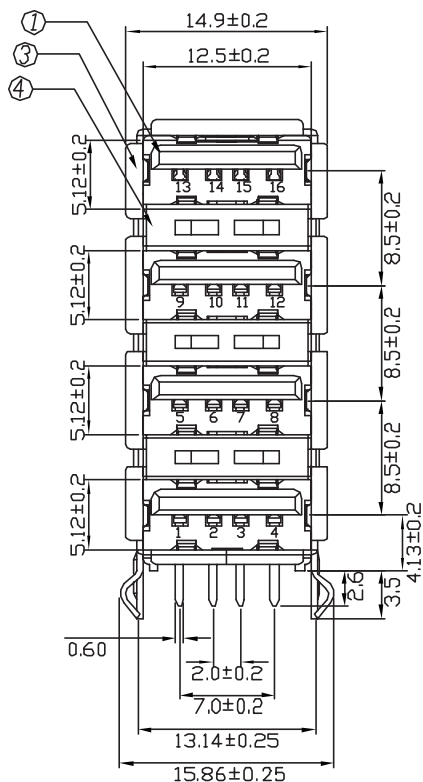

PCB LAYOUT
(BOTTOM VIEW)

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage: 500V AC (rms) for 1 Minute(Rev. 2.0)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	PIN TERM.	PHOS. BRONZE T:0.25	GOLD-TIN PLATED	16	Gold:30u"; Ni:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS, T:0.4	TIN PLATED	1	TIN:120~200u"
4	SPRING CLIP	BRASS, T:0.3	TIN PLATED	3	TIN:120~200u"
5	REAR SHELL	SPCC, T:0.3	NICKEL PLATED	1	NI:80~120u"
6	BOTTOM COVER	PBT G.F.	BLACK	1	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE


X. ± 0.38
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ± 1°

PPOJECTION



ORDER INFORMATION

USB1-FRSBKS30-4A-LF

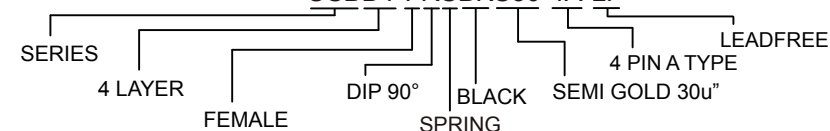

DESCRIPTION: