


**MATERIALS**

HOUSING: THERMOPLASTIC (UL 94V-0)  
 SHELL: SPCC, NICKEL PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

**SPECIFICATION**

CURRENT RATING: 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+85°C

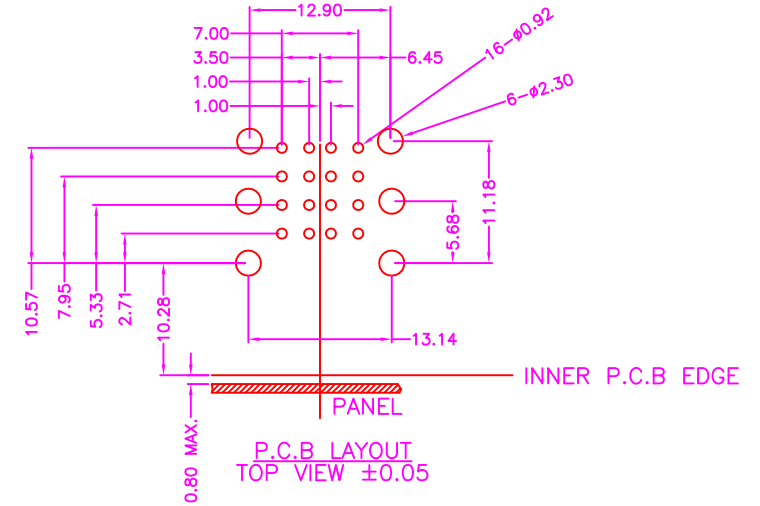

**RoHS Compliant**

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE

X. ± 0.40  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

SIZE A4 PPROJECTION

照片框

**ORDER INFORMATION**

USB1-FRXcc-4A-LF

SERIES | | | | LEADFREE  
 4 PIN A TYPE  
 BK:BLACK  
 WH:WHITE  
 FEMALE | NO SPRING  
 DIP 90°

DESCRIPTION: STACKED 4X1 USB A TYPE, PCB MOUNT, R/A, METAL SHIELD, FEMALE